

CLP-112-02-S-D-A

CLP-112-02-S-D-A Information

www.heisener.com	Part Number Manufacturer Category	CLP-112-02-S-D-A Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	.050" X .050	
	Package	-	回的受感
For Reference Only		For the pricing/inventory/lead time, please contact	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-112-02-S-D-A Specifications

Manufacturer Part NumberCLP-112-02-S-D-AManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeBeard to BoardStyleBoard to BoardNumber of Positions LoadedAllNumber of Rows2Rowspacing - MatingSolder (1.27mm)Mounting TypeSolderStriated TypeSolderStriated TypeSolderStriated TypeSolderSurface Mounting TypeSolderContact Finish - MatingSolderStriated TypeSolderStriated TypeSolder		
CategoryConnectors InterconnectsPackage-SeriesCLPConnector TypeReceptaleConnector TypeReceptaleConnector TypePackageStyleBoard oB Gard Gard Gard Gard Gard Gard Gard Gard	Manufacturer Part Number	CLP-112-02-S-D-A
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountYerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post.		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderFontact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Series	CLP
StyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationSurface MountFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions24Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationSurface MountFastening TypeSolderFontact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions	24
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.084" (2.14mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLP-112-02-S-D-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-112-02-S-D-A Payment Methods

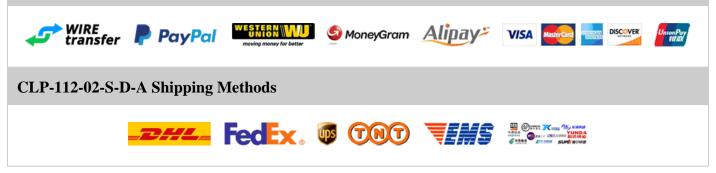

If you have any question about CLP-112-02-S-D-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com