

CLP-113-02-L-D-A

CLP-113-02-L-D-A Information

www.hetsener.com	Part Number Manufacturer Category	CLP-113-02-L-D-A Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	.050" X .050	10 A 10 A
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-113-02-L-D-A Specifications

Manufacturer Part NumberCLP-113-02-L-D-AManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllNumber of Rows2Number of Rows0.050" (1.27mm)Mouning TypeSolderTerminationSolderFasteing TypePush-PuilContact Finish - MatingGoldContact Finish - MatingGoldStore Finish - MatingSolderImate SolderSolderRow Spacing - MatingGoldSolder Finish - MatingGoldContact Finish - MatingGoldSolder Finish - MatingGoldContact Finish - MatingGoldSolder Finish - MatingGoldContact Finish - MatingGoldSolder Finish - MatingGold <td< th=""><th></th><th></th></td<>		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPich - Mating0.050° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFerminationGoldContact Finish - MatingIojui (0.25µm)Insulation ColorBackInsulation HeightSoles"	Manufacturer Part Number	CLP-113-02-L-D-A
Ackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypeOush - PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingJupin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSulface MountFastening TypeOiderContact Finish - MatingGoldContact Finish Thickness - MatingIptin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountFontact Finish - MatingGoldContact Finish - MatingGoldIonator Finish Thickness - MatingIopin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Series	CLP
StyleBoard to BoardNumber of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIoµin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Connector Type	Receptacle
Number of Positions26Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions	26
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)	Contact Finish - Mating	Gold
Insulation Height 0.084" (2.14mm)	Contact Finish Thickness - Mating	10μin (0.25μm)
	Insulation Color	Black
Contact Length - Post -	Insulation Height	0.084" (2.14mm)
•	Contact Length - Post	-
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLP-113-02-L-D-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-113-02-L-D-A Payment Methods

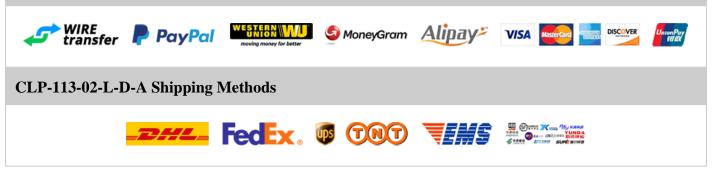

If you have any question about CLP-113-02-L-D-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com