

CLP-115-02-LM-D-PA-TR

CLP-115-02-LM-D-PA-TR Information

Turr.heisener.com	Part Number Manufacturer Category Description Package	CLP-115-02-LM-D-PA-TR Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets .050" X .050	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-115-02-LM-D-PA-TR Specifications

Manufacturer Part NumberCLP-115-02-LM-D-PA-TRManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesCLPContact TypeRectangular Connectors - Headers, Receptacles, Female SocketsContact TypeFemale SocketContact TypeReceptacle and the SocketStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllNumber of Rows2Row Spacing - MatingSolor (1.27mm)Munting TypeSolderFreminationSolderStriater MatingGoldContact Finish - MatingGoldStriater MatingGoldStriater MatingGoldStriater MatingSolderStriater MatingGoldStriater MatingGoldStriater MatingGoldStriater Finish Thickness - MatingJosef (1.21mm)Striater Finish Thickness - MatingJosef (1.21mm)Striater Finish Thickness - MatingJosef (1.21mm)Insulation ColorBackInsulation HeightJosef (1.21mm)Contact Finish Thickness - MatingJosef (1.21mm)Striater Finish Thickness - MatingJosef (1.21mm)Contact Finish Thickness - MatingJosef (1.21mm)Striater Finish Thickness - MatingJosef (1.21mm)<		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeBoard to BoardStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.50° (1.27mm)Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)Row Spacing - MatingSolderFerninationSolderForta Finish - MatingGoldContact Finish - MatingGoldSulation ColorJackInsulation ColorBlackInsulation Finish - MatingSolderInsulation Finish - MatingSolderContact Finish - MatingSolderSulation Finish - MatingSolderInsulation ColorBlackInsulation Finish - MatingSolderSolder Contact Finish - Ma	Manufacturer Part Number	CLP-115-02-LM-D-PA-TR
Image: Part of the sector of	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - Mating0.50° (1.27mm)Contact Finish - MatingGoldContact Finish - MatingGoldSurface MountSolderFastening TypeInjin (0.25µm)Contact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Orneat Engine TypeSic ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Songer Auting Type-SolderSolderSolderSolderSolderSolderContact Finish - MatingGoldSolder	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions30Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	CLP
StyleBoard to BoardNumber of Positions30Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 30 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Termination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Iupin (0.25µm) Insulation Color Black Insulation Height 0.084" (2.14mm) Contact Length - Post - Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSulface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorIlpuin (0.25µm)Insulation Height0.084" (2.14mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-55°C ~ 125°C	Number of Positions	30
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.084" (2.14mm)
	Contact Length - Post	-
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

CLP-115-02-LM-D-PA-TR Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-115-02-LM-D-PA-TR Payment Methods

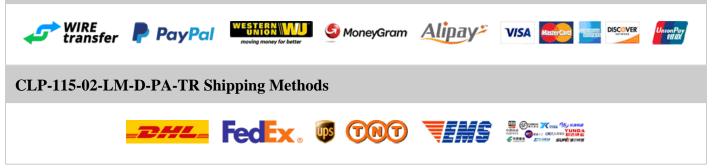

If you have any question about CLP-115-02-LM-D-PA-TR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com