

CLP-128-02-S-D-A

CLP-128-02-S-D-A Information

Part Number Manufacturer	CLP-128-02-S-D-A Samtec Inc.	
Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Description	.050" X .050	183823
Package	-	回致受感
For Reference Only	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-128-02-S-D-A Specifications

Manufacturer Part NumberCLP-128-02-S-D-AManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesCLPConnector TypeReceptacles, Female SocketsContact TypeReceptacles, Parale SocketSyleBoard to BoardNumber of PositionsS6Number of Positions LoadedAllNumber of Rows2Rewspacing - MatingSolor (1.27mm)Number of RowsSolorSyleSolor (1.27mm)Muning TypeSolderFarinationSolderFornationSolderSolard Finish - MatingSolderSolard Finish - MatingSolderFarinationSolderFarinationSolderFarinationSolderFarinationSolderInsulation ColorBackInsulation Finish - MatingSolar (2.41mm)Finish - MatingSolderFornationSolderFornationSolderFornationSolderFinish - MatingSolderFinish - MatingSolder </th <th></th> <th></th>		
CategoryConnectors, InterconnectsPackage-SeriesCLPConnector TypeReceptacleConnector TypeReceptacleContact TypeBacad Bacad	Manufacturer Part Number	CLP-128-02-S-D-A
IncludeRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS6Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderPrimitationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation FinishBlackInsulation Finish0.50% (1.41mm)Contact Finish - Post0.50% (1.41mm)Insulation FinishBlackInsulation Finish0.50% (1.41mm)Contact Finish - Post0.50% (1.41mm)	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSuface MountFastening TypeSuface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypeSulface MountContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Series	CLP
StyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Connector Type	Receptacle
Number of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions	56
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.084" (2.14mm)
Operating Temperature-55°C ~ 125°C	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLP-128-02-S-D-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-128-02-S-D-A Payment Methods

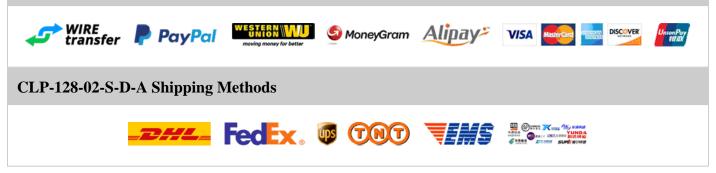

If you have any question about CLP-128-02-S-D-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com