

# ССР-129-02-F-D-К

#### CLP-129-02-F-D-K Information

surv.neisener.com	Part Number Manufacturer Category	Connectors, Interconnects	
	Description	Rectangular Connectors - Headers, Receptacles, Female Sockets .050" X .050	
For Reference Only	Package	- For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# CLP-129-02-F-D-K Specifications

ManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeBoard to BoardNumber of PositionsS8Number of Positions LoadedAllNumber of Rows2Row Spacing - MatingSolor' (1.27mm)Number of RowsSolor' (1.27mm)Solor (1.27mm)Solor' (1.27mm)Number of RowsSolor' (1.27mm)Number of RowsSolor' (1.27mm)Number of RowsSolor' (1.27mm)Solor (1.27mm)Solor' (1.27mm)Solor (1.27mm)Solor' (1.27mm)Solor (1.27mm)Solor' (1.27mm)So	Manufacturer Part Number	CLP-129-02-F-D-K
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFreminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Finish - MatingJin (0.08µm)Insulation Finish - MatingJin (0.08µm)Contact Finish Thickness - MatingJin (0.08µm)Insulation Finish - MatingJin (0.08µm)Insulation Finish - MatingJin (0.08µm)Contact Finish Thickness - MatingJin (0.08µm)Insulation Finish - MatingJ		
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS8Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSuface MountTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingJain (0.8µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS8Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonatt Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorJini (0.08µm)Insulation Height0.084" (2.14mm)Contact Length - Post-	Series	CLP
StyleBoard to BoardStyleBoard to BoardNumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions58Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions	58
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-	Contact Finish Thickness - Mating	3μin (0.08μm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.084" (2.14mm)
	Contact Length - Post	-
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

#### CLP-129-02-F-D-K Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### CLP-129-02-F-D-K Payment Methods

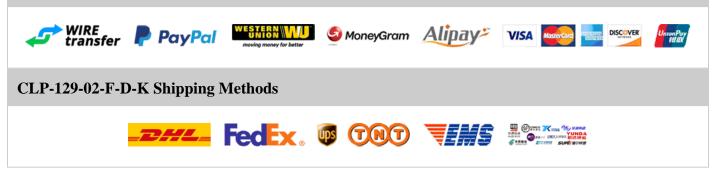

If you have any question about CLP-129-02-F-D-K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com