

CLP-139-02-L-D-A

CLP-139-02-L-D-A Information

		CLP-139-02-L-D-A Samtec Inc.	
Ca www.heisener.com	tegory	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
De	scription	.050" X .050	
Pa	ckage	-	国法語業は
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLP-139-02-L-D-A Specifications

Manufacturer Part NumberCLP-139-02-L-D-AManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesCLPConnector TypeReceptacles, Female SocketsContact TypeReceptacleSortic TypeBoard BoardNumber of Positions LoadedAllNumber of Rostins Loaded0.050" (1.27mm)Number of Rostins0.050" (1.27mm)Number of RostinsSocketNumber of Rostins Loaded0.050" (1.27mm)Number of Rostins LoadedNoter LoadedNumber of Rostins Lo		
CategoryConnectors - Headers, Receptacles, Female SocketsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeBoard BoardNumber of Positions78Number of Positions LoadedAllNumber of Rows2Row Spacing - MatingSolor' (1.27mm)Number of Rows0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSurface MountaFatening TypeSurface MountaContact Finish - MatingGoldContact Finish - MatingInjun (0.25µm)Insulation ColorBackInsulation Height0.684° (2.4mm)Contact Length - PostSolerSurface MatingSiderInsulation HeightSider CateScSore 125°CSore 215°C	Manufacturer Part Number	CLP-139-02-L-D-A
IcatageanRectangular Connectors - Headers, Receptacles, Fenale SocketsPackage-SeriesCLPConnector TypeReceptacleContact TypeFenale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.050°(1.27mm)Number of Rows2Row Spacing - Mating0.050°(1.27mm)Mounting TypeSurface MountForminationSolderForminationSolderForting TypeInden SolderContact Finish - MatingGoldInsulation ColorBlackInsulation Finish - MatingInden SolderInsulation Finish - MatingInden SolderInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation Finish - MatingInden SolderInsulation Finish - MatingSolderInsulation Finish	Manufacturer	Samtec Inc.
Package-SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Sore - 125°C-	Category	Connectors, Interconnects
SeriesCLPConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084° (2.14mm)Contact Length - Post-Contact Funsh - Mating50°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderTerminationSolderContact Finish - MatingOddContact Finish - MatingOddInsulation ColorInjuin (0.25µm)Insulation Height0.084" (2.14mm)Contact Length - Post-Sore - 125°C-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.0dInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	CLP
StyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 78 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.084" (2.14mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSurface MountFastening TypePosh-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.084" (2.14mm)Contact Length - Post-Contact Length - Post-Sore - 125°C-	Number of Positions	78
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI/uin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.084" (2.14mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.084" (2.14mm)
	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide
	Report errors?

CLP-139-02-L-D-A Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLP-139-02-L-D-A Payment Methods

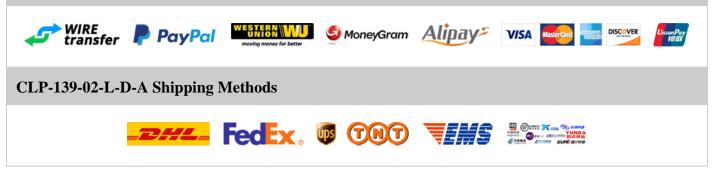

If you have any question about CLP-139-02-L-D-A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com