

CLT-114-02-L-D-K

CLT-114-02-L-D-K Information

WWW.havenov	Part Number Manufacturer Category	CLT-114-02-L-D-K Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	2MM SOCKET STRIPS	
For Reference Only	Package	- For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLT-114-02-L-D-K Specifications

Manufacturer Part NumberCLT-114-02-L-D-KManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesCLTConnector TypeReceptacle, Female SocketsContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Rows0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFerminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldStation ColorBackStation Finish - MatingGoldStation ColorBlackStation Finish - MatingJoin (0.25µm)Station ColorBlackStation Finish - MatingJoin (0.25µm)Station		
CategoryConnectors Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleConnector TypeReceptacleSoriesSocketStyleBoard observationsNumber of PositionsSaNumber of Positions LoadedAllPich - Mating0.079°(2.00mm)Number of Rows2Rowspacing - MatingSolderMounting TypeSuface MountaPichatingSolderForninationSolderForninationGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation ColorBackInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsul	Manufacturer Part Number	CLT-114-02-L-D-K
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting TypeSurface MountYerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingIupin (0.52µm)Insulation ColorBlackInsulation Height0.083° (2.10mm)	Manufacturer	Samtec Inc.
Package-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post.		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSulface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.083" (2.10mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Series	CLT
StyleBoard to BoardNumber of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Connector Type	Receptacle
Number of Positions28Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions	28
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.083" (2.10mm)
	Contact Length - Post	-
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

CLT-114-02-L-D-K Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLT-114-02-L-D-K Payment Methods

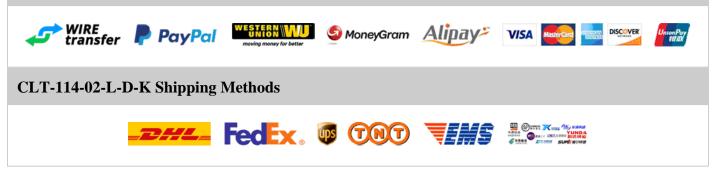

If you have any question about CLT-114-02-L-D-K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com