

# CLT-122-02-FM-D

### **CLT-122-02-FM-D Information**

	Part Number Manufacturer Category	CLT-122-02-FM-D Samtec Inc. Connectors, Interconnects	
WWW.helsener.com	8.	Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	2MM SOCKET STRIPS	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **CLT-122-02-FM-D Specifications**

Manufacturer Part NumberCLT-122-02-FM-DManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacles, Genetacles, Female SocketsPonteor TypeReceptacleContact TypeBeard to BoardStyleBoard to BoardNumber of Positions44Number of Positions Loaded0.079° (2.00mm)Number of Rows2Rew Spacing - Mating0.079° (2.00mm)Mounting TypeSurface MountFartinationSolderFornationSolderFornationSolderFartinationGoldContact Finish - MatingGoldInsulation ColorBackInsulation Finish - MatingSolderFornationSolderFartinationSolderFornationSolderFornation Finish - MatingGoldInsulation ColorBackInsulation Finish - MatingSolderFornationSolderFornationSolderFinish - MatingSolderFinish - Mating <th></th> <th></th>				
CategoryConnectors, InterconnectsPackage-SeriesCLTConnector TypeReceptaceConnector TypeReceptaceContact TypeBeards ContertStyleBoard to BoardNumber of Positions44Number of Positions Loaded10.079°(2.00mm)Number of Rows2Row Spacing - MatingSolderNumber of RowsSolderRow Spacing - MatingSolderRouting TypeSolderForninationSolderContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorJin (0.08µm)Insulation Finish - MatingSolderInsulation Finish - MatingSolderContact Finish - MatingSolderInsulation Finish	Manufacturer Part Number	CLT-122-02-FM-D		
InterfactRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079°(2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderPitch InformationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation FinishBlackInsulation Finish0.038°(2.10mm)Contact Finish - Mating0.038°(2.10mm)	Manufacturer	Samtec Inc.		
Package-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Category	Connectors, Interconnects		
SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBackInsulation Height0.083" (2.10mm)Contact Length - Post-	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Series	CLT		
StyleBoard to BoardNumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Connector Type	Receptacle		
Yumber of Positions44Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions	44		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Mounting Type	Surface Mount		
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Termination	Solder		
Contact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish - Mating	Gold		
Insulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish Thickness - Mating	3μin (0.08μm)		
Contact Length - Post -	Insulation Color	Black		
-	Insulation Height	0.083" (2.10mm)		
Operating Temperature -55°C ~ 125°C	Contact Length - Post	-		
	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report errors	?

## CLT-122-02-FM-D Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# **CLT-122-02-FM-D Payment Methods**

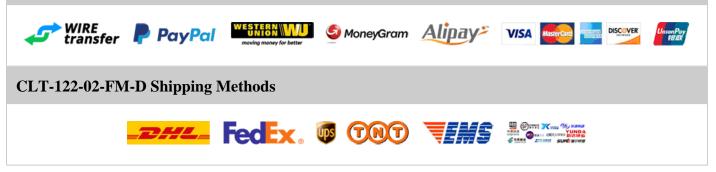

If you have any question about CLT-122-02-FM-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com