

CLT-124-03-S-D

CLT-124-03-S-D Information

WWW. And Sense recent	Part Number Manufacturer	CLT-124-03-S-D Samtec Inc	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	2MM SOCKET STRIPS	
	Package	- For the pricing/inventory/lead time, please contact	间的常料
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLT-124-03-S-D Specifications

Manufacturer Part NumberCLT-124-03-S-DManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoardNumber of Positions LoadedAlNumber of Rows2Row Spacing - Mating0079" (2.00mm)Number of Rows0.079" (2.00mm)Mounting TypeThrough HoleFerminationSolderFerminationSolderFastening TypeQuin (0.76µm)Contact Finish - Mating0.010(.76µm)Insulation ColorBlackInsulation Fosti30µin (0.76µm)Contact Length - Post0.016" (2.95mm)Contact Length - Post0.116" (2.95mc)Contact Length - Post0.115" C.125"CVeryVeryVerySolderContact Finish Finish Charier0.115" C.125"CVeryVerySolderVeryVerySolderSolder0.115" C.125"CVeryVeryVerySolderVerySolder <td< th=""><th></th><th></th></td<>		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series CLT Connector Type Receptacle Contact Type Receptacle Contact Type Board to Board Style Board to Board Number of Positions 48 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Through Hole Youngh Type Solder Termination Solder Contact Finish - Mating Oujn (0.76µm) Contact Finish Thickness - Mating Jouin (0.76µm) Subation Floit Solder Insulation Color Black Insulation Floit Solar(2.10mm) Subation Floit Solar(2.10mm) Subation Floit Solar(2.10mm)	Manufacturer Part Number	CLT-124-03-S-D
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOusf - PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting Type0.079° (2.00mm)Mounting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJoin (0.76µm)Insulation ColorBlackInsulation Height0.083° (2.10mm)Contact Length - Post0.116° (2.95mm)Operating Temperature55° C~ 125°C	Category	Connectors, Interconnects
SeriesCLTConector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeDiorogh (2.00mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingSipin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (.00mm)Number of Rows2Row Spacing - Mating0.079" (.00mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGulInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.076 µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Series	CLT
StyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 48 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.083" (2.10mm) Contact Length - Post 0.116" (2.95mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Number of Positions	48
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.083" (2.10mm) Contact Length - Post 0.116" (2.95mm) Operating Temperature -55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.083" (2.10mm) Contact Length - Post 0.116" (2.95mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post0.116" (2.95mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.083" (2.10mm)
	Contact Length - Post	0.116" (2.95mm)
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

CLT-124-03-S-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLT-124-03-S-D Payment Methods

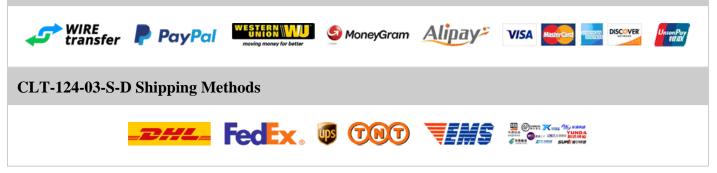

If you have any question about CLT-124-03-S-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com