

CLT-128-02-F-D-BE-K

CLT-128-02-F-D-BE-K Information

		Part Number Manufacturer Category	CLT-128-02-F-D-BE-K Samtec Inc. Connectors, Interconnects	
	www.heldine.com		Rectangular Connectors - Headers, Receptacles, Female Sockets	55535248
		Description	2MM SOCKET STRIPS	
		Package	-	回線電影
			For the pricing/inventory/lead time, please contact	
	For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLT-128-02-F-D-BE-K Specifications

Manufacturer Part NumberCLT-128-02-F-D-BE-KManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesCLTConnector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPrich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderYate Finsh - MatingSolderSolder Finsh - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldSolder Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingSolderSolder Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingSolderContact Finish - MatingSolderSolder Finish - MatingSolderContact Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - MatingSolderContact Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - MatingSolderSolder Finish - Thickness - MatingSolderSo		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacle, Bottom EntryConnector TypeBeade SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mn)Number of Rows2Row Spacing - MatingSolderYouring TypeSolderFerminationSolderFortaring TypeGoldContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBiackInsulation ColorBiackInsulation Height0.083" (2.10mn)Contact Length - Post-Contact Length - Post-	Manufacturer Part Number	CLT-128-02-F-D-BE-K
Ice cataguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacle, Bottom EntryContact TypeBoard to BoardNumber of PositionsSocketNumber of Positions LoadedAllPich - Mating0.079° (2.00mm)Number of Rows2Rowspacing - Mating0.079° (2.00mm)Number of Positions0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of Rows0.019° (2.00mm)Number of Rows0.016° (2.0	Manufacturer	Samtec Inc.
Package-SeriesCLTConnector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS6Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingSin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLTConnector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBiackInsulation Height0.083" (2.10mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingBiackInsulation ColorBackInsulation Height0.083" (2.10mm)Contact Length - Post-	Series	CLT
StyleBoard to BoardNumber of Positions56Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Connector Type	Receptacle, Bottom Entry
Number of Positions 56 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type Surface Mount Termination Sulface Mount Fastening Type Push-Pull Contact Finish - Mating Gold Isulation Color Black Insulation Height 0.083" (2.10mm) Contact Length - Post -	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountFastening TypeSolderFontact Finish - MatingPush-PullContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions	56
Number of Rows2Number of Rows0.079" (2.00mm)Row Spacing - MatingSurface MountMounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish Thickness - Mating	3µin (0.08µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.083" (2.10mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

CLT-128-02-F-D-BE-K Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLT-128-02-F-D-BE-K Payment Methods

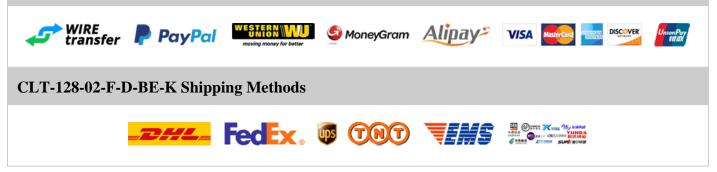

If you have any question about CLT-128-02-F-D-BE-K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com