

CLT-143-02-F-D-K

CLT-143-02-F-D-K Information

Part Nur	nber CLT-143-02-F-D-K	
Manufac	turer Samtec Inc.	
Category	 Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets 	
Descripti	ion 2MM SOCKET STRIPS	
Package	-	
	For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLT-143-02-F-D-K Specifications

Manufacturer Part NumberCLT-143-02-F-D-KManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesCLTConnector TypeReceptacles, Female SocketsContact TypeFemale SocketStyleBoard to BoardNumber of PositionsS6Number of Rows2Number of Rows0.079" (2.00mm)Number of RowsSurface MountMounting TypeSurface MountMounting TypeSurface MountFerniationSolderFastening TypeGuidContact Finish Thickness - MatingGuidSolderSurface MountFundation ColorBackContact Finish Thickness - MatingGuidContact Finish Thickness - MatingSick Colomm)Contact Finish Thickness - MatingSick Colomm)Contact Length PostSicce LargeSultation ColorFice LargeSolderSick Colomm)Contact Length PostSick Colomm)Contact Length PostSice Large Colomm)Co		
CategoryConnectors InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleConnector TypeReceptacleStyleBard to BoardNumber of Positions86Number of Positions LoadedIIPich - Mating0.079°(2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFreminationSolderForting TypeSolderForting TypeSolder	Manufacturer Part Number	CLT-143-02-F-D-K
Iccangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPich - Mating0.079° (2.00mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFortaring TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldSolder Contact Finish - MatingBiakInsulation ColorBlackInsulation Finish - MatingSolderSolder Contact Finish - MatingSolderContact Finish - MatingSolderSolder Contact Finish - MatingSolderS	Manufacturer	Samtec Inc.
Package-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountForninationSolderForninationGoldContact Finish - MatingGoldInsulation ColorJain (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingSolderContact Finish - MatingGoldInsulation ColorJain (0.08µm)Insulation FleightJoss" (2.10mm)Finsulation FleightJoss" (2.10mm) </td <td></td> <td>Rectangular Connectors - Headers, Receptacles, Female Sockets</td>		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSulface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Series	CLT
StyleBoard to BoardNumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions86Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJain (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions	86
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.083" (2.10mm)Contact Length - Post-	Contact Finish Thickness - Mating	3μin (0.08μm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.083" (2.10mm)
	Contact Length - Post	-
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

CLT-143-02-F-D-K Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLT-143-02-F-D-K Payment Methods

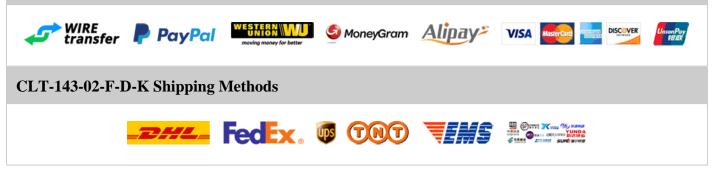

If you have any question about CLT-143-02-F-D-K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com