

CLT-148-01-FM-D

CLT-148-01-FM-D Information

	Part Number Manufacturer	CLT-148-01-FM-D Samtec Inc.	
www.horsene.com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	2MM SOCKET STRIPS	
	Package	-	国際支援
		For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CLT-148-01-FM-D Specifications

Manufacturer Part NumberCLT-148-01-FM-DManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesCLTConnector TypeReceptacles, Female SocketsContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypeUsh-PullContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBackInsulation ColorBackStation Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingSolderContact Finish - MatingSo				
CategoryConnectors InterconnectsPackage-SeriesCLTConnector TypeReceptaleConnector TypeReceptaleConnector TypePackageStyleBoard BoardNumber of Positions96Number of Positions Loaded1007°(200mm)Number of Rows2Rowspacing - Mating0.079°(200mm)Number of Rows0.079°(200mm)Number of Rows3016°FerninationSolderFording TypeSolderFording TypeSolderFording TypeSolderFording TypeSolderStating TypeSolderFording TypeSolderFording TypeSolderFording TypeSolderFording TypeSolderStating TypeSolderFording TypeSolderF	Manufacturer Part Number	CLT-148-01-FM-D		
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting Type0.079° (2.00mm)Young TypeSolderFarminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.083° (2.10mm)Contact Length - Post0.085° (2.16mm)	Manufacturer	Samtec Inc.		
Package-SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Category	Connectors, Interconnects		
SeriesCLTConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBackInsulation Height0.083" (2.10mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Series	CLT		
StyleBoard to BoardNumber of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Connector Type	Receptacle		
Number of Positions96Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleFastening TypeSolderFontact Finish - MatingGoldContact Finish Thickness - MatingJain (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Number of Positions	96		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Row Spacing - Mating	0.079" (2.00mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Termination	Solder		
Contact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Contact Finish - Mating	Gold		
Insulation Height0.083" (2.10mm)Contact Length - Post0.085" (2.16mm)	Contact Finish Thickness - Mating	3μin (0.08μm)		
Contact Length - Post 0.085" (2.16mm)	Insulation Color	Black		
-	Insulation Height	0.083" (2.10mm)		
Operating Temperature -55°C ~ 125°C	Contact Length - Post	0.085" (2.16mm)		
	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report errors	2

CLT-148-01-FM-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CLT-148-01-FM-D Payment Methods

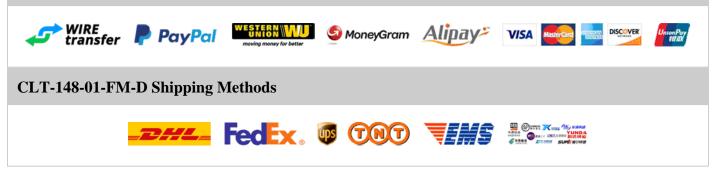

If you have any question about CLT-148-01-FM-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com