


CMF0768K000GKBF

CMF0768K000GKBF Information

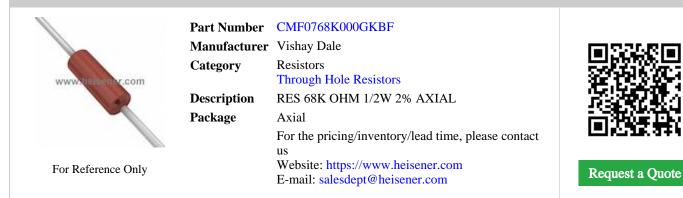

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF0768K000GKBF Specifications

Manufacturer Part NumberCMF0768K000GKBFManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance68 kOhmsTolerance±2%Power (Watts)Ost, 1/2WCompositionHeater Alden Coating, Moisture Resistant, SafetyFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Failure Rate1Failure Rate-Failure Rate-		
CategoryResistorsFackageAxialPackageAxialSeriesCMFResistance68 kOhmsTolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPopper furgerature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2	Manufacturer Part Number	CMF0768K000GKBF
FriedThrough Hole ResistorsPackageAxialSeriesCMFResistance68 kOhmsTolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance68 kOhmsTolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Category	Resistors
SeriesCMFResistance68 kOhmsTolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2		Through Hole Resistors
Resistance68 kOhmsTolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Package	Axial
Tolerance±2%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Resistance	68 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Tolerance	$\pm 2\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
	Height - Seated (Max)	-
Failure Rate -	Number of Terminations	2
	Failure Rate	-
Report errors?		Report errors?

CMF0768K000GKBF Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE ELARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF0768K000GKBF Payment Methods



If you have any question about CMF0768K000GKBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com