


CMF20750K00GKEA

CMF20750K00GKEA Information

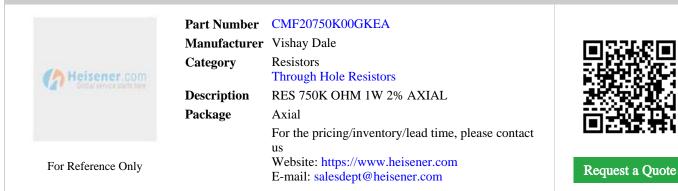

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF20750K00GKEA Specifications

Manufacturer Part NumberCMF20750K00GKEAManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance750 kOhmsTolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Number of Terminations2Package / Case-Supplier Device Package-Size / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Supplier Device Package-Supplier Device Package-Supplier Device Package-Supplier Device Package-Stare / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Supplier Device Package-Supplier Device Package-Stare / Dimension-Stare / Dimension <t< th=""><th></th><th></th></t<>		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance500 kOhmsTolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~175°CPackage / CaseAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate-Starter Safety-Starter Safety- <td>Manufacturer Part Number</td> <td>CMF20750K00GKEA</td>	Manufacturer Part Number	CMF20750K00GKEA
Through Hole ResistorsPackageAxialPackageCMFResistance750 kOhmsTolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyToperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.375° L (3.68mm x 9.53mm)Height - Seated (Max)2Failure Rate-Failure Rate- <td< td=""><td>Manufacturer</td><td>Vishay Dale</td></td<>	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance750 kOhmsTolerance±2%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.375° L (3.68mm x 9.53mm)Height - Seated (Max)2Aunber of Terminations2Failure Rate-	Category	Resistors
SeriesCMFResistance750 kOhmsTolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance750 kOhmsTolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Package	Axial
Tolerance±2%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.375° L (3.68mm x 9.53mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Artice-State Constructions-State Constructions <t< td=""><td>Series</td><td>CMF</td></t<>	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Auiler Rate-	Resistance	750 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 2\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.145" Dia x 0.375" L (3.68mm x 9.53mm)Failure Rate-Output-State (Max)-State (Max)-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.375" L (3.68mm x 9.53mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
Report chois.		Report errors?

CMF20750K00GKEA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF20750K00GKEA Payment Methods



If you have any question about CMF20750K00GKEA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com