


# CMF501K6000GKBF

## CMF501K6000GKBF Information

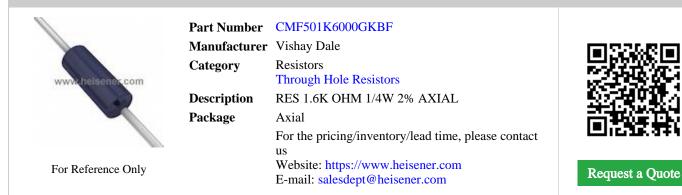

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# CMF501K6000GKBF Specifications

Manufacturer Part NumberCMF501K6000GKBFManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
CategoryResistorsCategoryResistorsPackageAxialPackageCMFResistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTonperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Through Hole ResistorsPackageAxialSeriesCMFResistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
PackageAxialSeriesCMFResistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
NumberSeriesCMFResistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Resistance1.6 kOhmsTolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Tolerance±2%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Operating Temperature-55°C ~ 175°CPackage / CaseAxial
Package / Case Axial
Supplier Device Package Axial
Size / Dimension 0.065" Dia x 0.150" L (1.65mm x 3.81mm)
Height - Seated (Max) -
Number of Terminations 2
Failure Rate -
Report errors?

### CMF501K6000GKBF Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### CMF501K6000GKBF Payment Methods



If you have any question about CMF501K6000GKBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com