


CMF501K6200FKEA

CMF501K6200FKEA Information

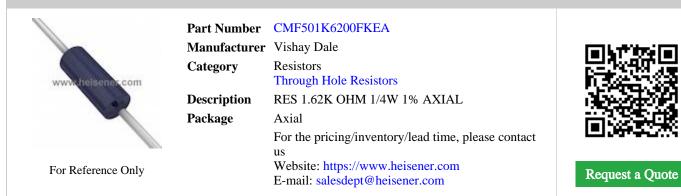

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF501K6200FKEA Specifications

ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065° Di ax 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2		
CategoryResistorsThrough Hole ResistorsPackageAxialPackageCMFResistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WPower (Watts)Metal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2	Manufacturer Part Number	CMF501K6200FKEA
Through Hole ResistorsPackageAxialPackageCMFResistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Xumber of Terminations2	Category	Resistors
SeriesCMFResistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2		Through Hole Resistors
Resistance1.62 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2	Package	Axial
Tolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Series	CMF
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Resistance	1.62 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	0.25W, 1/4W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 175°C
In a constraint0.065" Dia x 0.150" L (1.65mm x 3.81mm)Size / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.065" Dia x 0.150" L (1.65mm x 3.81mm)
	Height - Seated (Max)	-
Failure Rate	Number of Terminations	2
	Failure Rate	-
Report errors?		Report errors?

CMF501K6200FKEA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF501K6200FKEA Payment Methods



If you have any question about CMF501K6200FKEA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com