


CMF5026R400DHR6

CMF5026R400DHR6 Information

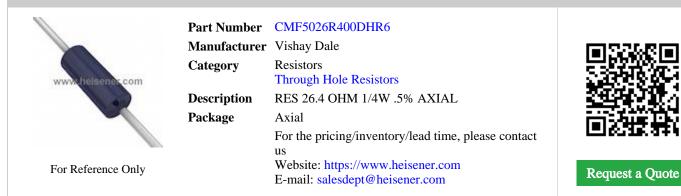

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF5026R400DHR6 Specifications

Manufacturer Part NumberCMF5026R400DHR6ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPenperature Coefficient±50ppn/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.055" L (1.65mm x 3.81mm)		
CategoryResistorsCategoryThrough Hole ResistorsPackageAxialPackageCMFResistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.065° Di ax 0.150° L (1.65mm x 3.81mm)	Manufacturer Part Number	CMF5026R400DHR6
Through Hole ResistorsPackageAxialSeriesCMFResistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Category	Resistors
SeriesCMFResistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)		Through Hole Resistors
Resistance26.4 OhmsTolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Package	Axial
Tolerance±0.5%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Series	CMF
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Resistance	26.4 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Tolerance	$\pm 0.5\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Power (Watts)	0.25W, 1/4W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.065" Dia x 0.150" L (1.65mm x 3.81mm)	Package / Case	Axial
	Supplier Device Package	Axial
	Size / Dimension	0.065" Dia x 0.150" L (1.65mm x 3.81mm)
Height - Seated (Max) -	Height - Seated (Max)	-
Number of Terminations 2	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

CMF5026R400DHR6 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF5026R400DHR6 Payment Methods



If you have any question about CMF5026R400DHR6, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com