


CMF502K7400FKEB

CMF502K7400FKEB Information

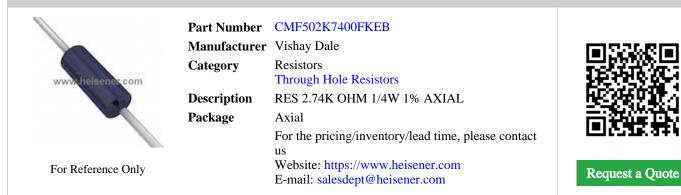

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF502K7400FKEB Specifications

| ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance2.74 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.065° Dia x 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)-Failure Rate-Failure R | | |
|---|--------------------------|---|
| CategoryResistorsPackageAxialPackageCMFResistance2.74 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065° Di ax 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)2Failure Rate-Failure Rate- <td>Manufacturer Part Number</td> <td>CMF502K7400FKEB</td> | Manufacturer Part Number | CMF502K7400FKEB |
| Through Hole ResistorsPackageAxialPackageCMFResistance2.74 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Failure Rate-Failure Rate- </td <td>Manufacturer</td> <td>Vishay Dale</td> | Manufacturer | Vishay Dale |
| PackageAxialSeriesCMFResistance2.74 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOppraring Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Failure Rate-Failure Rate-Failure Rate- | Category | Resistors |
| Series CMF Resistance 2.74 kOhms Tolerance ±1% Power (Watts) 0.25W, 1/4W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Poper (Yatse) ±100ppm/°C Operating Temperature -55°C ~ 175°C Package / Case Axial Supplier Device Package Axial Size / Dimension 0.065° Dia x 0.150° L (1.65mm x 3.81mm) Height - Seated (Max) - Failure Rate - | | Through Hole Resistors |
| Resistance2.74 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Starter of Terminations2Failure Rate- | Package | Axial |
| Tolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Stafe of Terminations2Failure Rate- | Series | CMF |
| Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Resistance | 2.74 kOhms |
| CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Tolerance | $\pm 1\%$ |
| FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Power (Watts) | 0.25W, 1/4W |
| Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Composition | Metal Film |
| Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Features | Flame Retardant Coating, Moisture Resistant, Safety |
| Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Temperature Coefficient | ±100ppm/°C |
| Supplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Operating Temperature | -55°C ~ 175°C |
| Size / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Package / Case | Axial |
| Height - Seated (Max)-Number of Terminations2Failure Rate- | Supplier Device Package | Axial |
| Number of Terminations 2 Failure Rate - | Size / Dimension | 0.065" Dia x 0.150" L (1.65mm x 3.81mm) |
| Failure Rate - | Height - Seated (Max) | - |
| | Number of Terminations | 2 |
| Report errors? | Failure Rate | - |
| | | Report errors? |

CMF502K7400FKEB Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF502K7400FKEB Payment Methods



If you have any question about CMF502K7400FKEB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com