


CMF503K2000BEEB

CMF503K2000BEEB Information

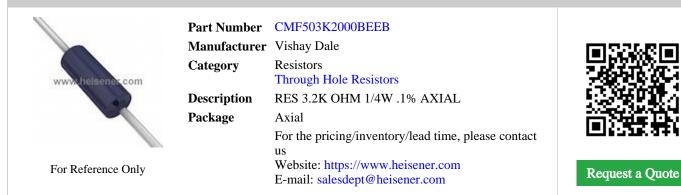

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF503K2000BEEB Specifications

Manufacturer Part NumberCMF503K2000BEEBManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionHane Retardant Coating, Moisture Resistant, SafetyFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065° Dia x 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)2		
CategoryResistorsPackageAxialPackageCMFResistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2Number of Terminations2	Manufacturer Part Number	CMF503K2000BEEB
Frough Hole ResistorsPackageAxialSeriesCMFResistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialHeight - Seated (Max).Number of Terminations2	Category	Resistors
SeriesCMFResistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2		Through Hole Resistors
Resistance3.2 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2	Package	Axial
Tolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2Number of Terminations2	Series	CMF
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Resistance	3.2 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient $\pm 25pm/^{\circ}C$ Operating Temperature $-55^{\circ}C \sim 175^{\circ}C$ Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	0.25W, 1/4W
Temperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±25ppm/°C
Supplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.065" Dia x 0.150" L (1.65mm x 3.81mm) Height - Seated (Max) - Number of Terminations 2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.065" Dia x 0.150" L (1.65mm x 3.81mm)
	Height - Seated (Max)	-
	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

CMF503K2000BEEB Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF503K2000BEEB Payment Methods



If you have any question about CMF503K2000BEEB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com