


CMF50787K00FKEA

CMF50787K00FKEA Information

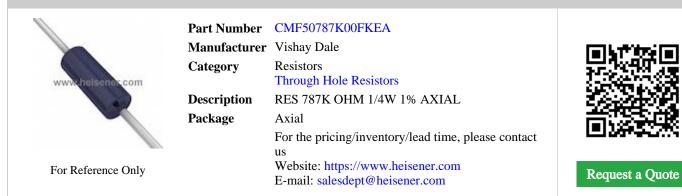

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF50787K00FKEA Specifications

ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance787 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.055°D ia x 0.150°L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance787 kOhnsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTolppm/°C±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.065° Di ax 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)-Yumber of Terminations2Failure Rate-Failure Rate-<	Manufacturer Part Number	CMF50787K00FKEA
Through Hole ResistorsPackageAxialSeriesCMFResistance787 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTolerance±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Stafure Rete-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance787 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSupplier Device Package0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2Failure Rate-	Category	Resistors
SeriesCMFResistance787 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2Faluree Rate-Faluree Rate-		Through Hole Resistors
Resistance787 kOhmsTolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065° Dia x 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.065° Dia x 0.150° L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Series	CMF
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	787 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.25W, 1/4W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	$\pm 100 ppm^{/\circ}C$
Supplier Device PackageAxialSize / Dimension0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
NimeComparison0.065" Dia x 0.150" L (1.65mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations 2 Failure Rate -	Size / Dimension	0.065" Dia x 0.150" L (1.65mm x 3.81mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF50787K00FKEA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF50787K00FKEA Payment Methods



If you have any question about CMF50787K00FKEA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com