


CMF55105K00BEBF70

CMF55105K00BEBF70 Information

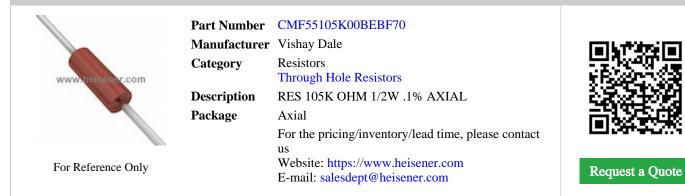

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF55105K00BEBF70 Specifications

Manufacturer Part NumberCMF55105K00BEBF70ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance105 KOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Faiture Rate-Faiture Rate-Size / Dimension2Height - Seated (Max)-Faiture Rate-Faiture Rate-Faiture Rate-Size / Dimension-Height - Seated (Max)-Size / Dimensions2Size / Dimensions-Size / Di		
CategoryResistorsPackageAxialPackageCMFResistance105 kOhmsTolerance±0.1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Anial-Stare for Erminations2Failure Rate-Failure Rate-Stare for Erminations-Stare for Ermin	Manufacturer Part Number	CMF55105K00BEBF70
Through Hole ResistorsPackageAxialSeriesCMFResistance105 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance105 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±25ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (0.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate <t< td=""><td>Category</td><td>Resistors</td></t<>	Category	Resistors
SeriesCMFResistance105 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate		Through Hole Resistors
Resistance105 kOhmsTolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Keight - Seated (Max)-Aumber of Terminations2Failure Rate-Failure Rate-Failur	Package	Axial
Tolerance±0.1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Suppler Device Package-Suppler Other Seated (Max)-Suppler Other Seated	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Failure Rate2	Resistance	105 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Sumber of Terminations2Failure Rate-	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures£25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±25ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF55105K00BEBF70 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF55105K00BEBF70 Payment Methods



If you have any question about CMF55105K00BEBF70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com