


CMF5522R000JKEB39

CMF5522R000JKEB39 Information

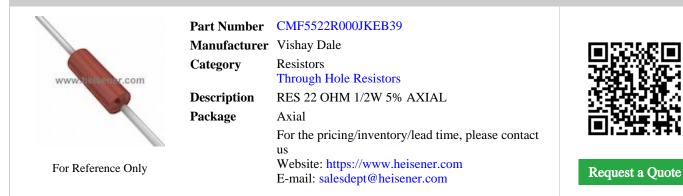

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF5522R000JKEB39 Specifications

Manufacturer Part Number CMF5522R000JKEB39 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF5 Resistance 22 Ohms Tolerance ±5% Power (Watts) 0.5W, 1/2W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature -55°C ~ 175°C Operating Temperature Axial Size / Dimension 0.0900° Dia x 0.240° L (2.29mm x 6.10mm) Height - Seated (Max) - Number of Terminations 2		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance22 OhmsTolerance±5%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Failure Rate-Failure Rate-Stard (Max)-Stard (Max)- </td <td>Manufacturer Part Number</td> <td>CMF5522R000JKEB39</td>	Manufacturer Part Number	CMF5522R000JKEB39
Through Hole ResistorsPackageAxialSeriesCMFResistance22 OhmsTolerance±5%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTomperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate <td>Manufacturer</td> <td>Vishay Dale</td>	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance22 OhmsTolerance±5%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±5°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Anumber of Terminations2Failure Rate-	Category	Resistors
SeriesCMFResistance22 OhmsTolerance±5%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance22 OhmsTolerance±5%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Package	Axial
Tolerance±5%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Anale-Composition-Compositi	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	22 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 5\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.090" Dia x 0.240" L (2.29mm x 6.10mm)Failure Rate-Autor of Terminations-Construc	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
Report citors.		Report errors?

CMF5522R000JKEB39 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF5522R000JKEB39 Payment Methods





If you have any question about CMF5522R000JKEB39, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com