


CMF55512R00FKR639

CMF55512R00FKR639 Information

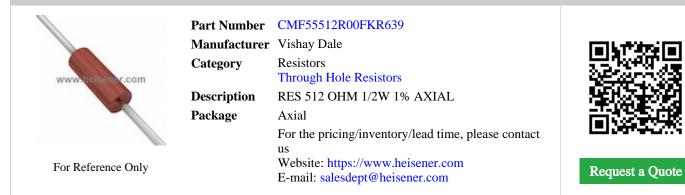

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF55512R00FKR639 Specifications

Manufacturer Part NumberCMF55512R00FKR639ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance512 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPackage / CaseAxialSupjer Device PackageAxialSize / Dimension0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2Number of Terminations2Number of Terminations0Number of Terminations </th <th></th> <th></th> <th></th>			
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance512 OhmsTolerance1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100ppm°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate <td< td=""><td>Manufacturer Part Number</td><td>CMF55512R00FKR639</td><td></td></td<>	Manufacturer Part Number	CMF55512R00FKR639	
Through Hole ResistorsPackageAxialPackageCMFResistance512 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTomperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate<	Manufacturer	Vishay Dale	
PackageAxiaSeriesCMFResistance512 OhmsTolerance±1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Anuber of Terminations2Failure Rate-	Category	Resistors	
SeriesCMFResistance512 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors	
Resistance512 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package	Axial	
Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Anale-Composition-Compositi	Series	CMF	
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	512 Ohms	
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$	
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W	
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film	
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C	
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C	
Number of Terminations0.090" Dia x 0.240" L (2.29mm x 6.10mm)Failure Rate-Autor of Terminations-Construc	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial	
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)	
Failure Rate -	Height - Seated (Max)	-	
	Number of Terminations	2	
	Failure Rate	-	
Report errors?		Report error	ors?

CMF55512R00FKR639 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

S MoneyGram Alipay VISA

DISCOVER

CMF55512R00FKR639 Payment Methods



CMF55512R00FKR639 Shipping Methods



If you have any question about CMF55512R00FKR639, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com

N J