


CMF5552R300FKEB70

CMF5552R300FKEB70 Information

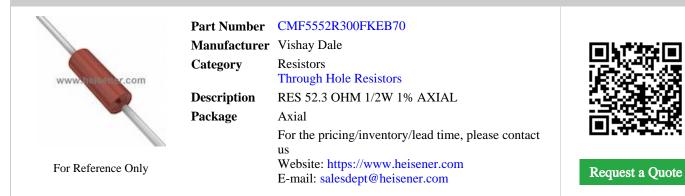

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF5552R300FKEB70 Specifications

| Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Composition-State Composition< | | |
|--|--------------------------|---|
| CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance52.3 OhmsTolerance1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTolprance+100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Failure Rate- <td>Manufacturer Part Number</td> <td>CMF5552R300FKEB70</td> | Manufacturer Part Number | CMF5552R300FKEB70 |
| Through Hole ResistorsPackageAxialPackageCMFResistance52.3 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTolerance±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate- | Manufacturer | Vishay Dale |
| PackageAxiaSeriesCMFResistance52.3 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate- | Category | Resistors |
| SeriesCMFResistance52.3 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate- | | Through Hole Resistors |
| Resistance52.3 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Package | Axial |
| Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Composition-State Composition< | Series | CMF |
| Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Resistance | 52.3 Ohms |
| CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Tolerance | $\pm 1\%$ |
| FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Power (Watts) | 0.5W, 1/2W |
| Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Composition | Metal Film |
| Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Features | Flame Retardant Coating, Moisture Resistant, Safety |
| Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Temperature Coefficient | $\pm 100 ppm^{/\circ}C$ |
| Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Operating Temperature | -55°C ~ 175°C |
| Number of Terminations0.090" Dia x 0.240" L (2.29mm x 6.10mm)Failure Rate-Autor of Terminations-Construc | Package / Case | Axial |
| Height - Seated (Max)-Number of Terminations2Failure Rate- | Supplier Device Package | Axial |
| Number of Terminations2Failure Rate- | Size / Dimension | 0.090" Dia x 0.240" L (2.29mm x 6.10mm) |
| Failure Rate - | Height - Seated (Max) | - |
| | Number of Terminations | 2 |
| Report errors? | Failure Rate | - |
| | | Report errors? |

CMF5552R300FKEB70 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

CMF5552R300FKEB70 Payment Methods

CMF5552R300FKEB70 Shipping Methods



If you have any question about CMF5552R300FKEB70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com