


## CMF55665R00FKR670

#### CMF55665R00FKR670 Information

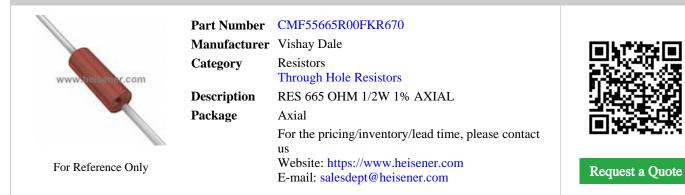

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### CMF55665R00FKR670 Specifications

Manufacturer Part Number CMF55665R00FKR670   Manufacturer Vishay Dale   Category Resistors   Through Hole Resistors Through Hole Resistors   Package Axial   Series CMF   Resistance 665 Ohms   Tolerance ±1%   Power (Watts) 0.5W, 1/2W   Composition Metal Film   Features Flame Retardant Coating, Moisture Resistant, Safety   Operating Temperature 4xial   Supplier Device Package Axial   Size / Dimension 0.900° Dia x 0.240° L (2.29mm x 6.10mm)   Height - Seated (Max) -   Number of Terminations 2   Failure Rate -		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance665 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CSupplier Device PackageAxialSize / Dimension0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure R	Manufacturer Part Number	CMF55665R00FKR670
Through Hole ResistorsPackageAxialSeriesCMFResistance665 OhnsTolerance±1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance665 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.900° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-	Category	Resistors
SeriesCMFResistance665 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance665 OhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Failure Rate-Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)-<	Series	CMF
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.90° Dia x 0.240° L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-	Resistance	665 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.090" Dia x 0.240" L (2.29mm x 6.10mm)Failure Rate-Autor of Terminations2Constructions-Construc	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

#### CMF55665R00FKR670 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### CMF55665R00FKR670 Payment Methods



If you have any question about CMF55665R00FKR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com