


CMF557M6800FKEB

CMF557M6800FKEB Information

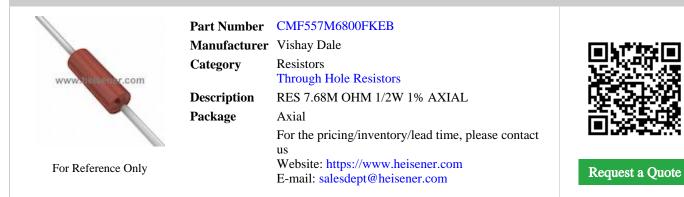

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF557M6800FKEB Specifications

Manufacturer Part Number CMF557M6800FKEB Manufacturer Vishay Dale Category Resistors Category Through Hole Resistors Package Axial Series CMF Resistance 7.68 MOhms Tolerance ±1% Power (Watts) 0.5W, 1/2W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature -55°C ~ 175°C Operating Temperature Axial Size / Dimension 0.0900° Dia x 0.240° L (2.29mm x 6.10mm) Height - Seated (Max) 2 Number of Terminations 2			
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance7.68 MOhnsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppn/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Annabel Coefficient1Height - Rete-Size / Dimension-Height - Rete (Max)-Sunder Greminations2Failure Rate-Failure Rate-Starter Rater Rate-Starter Rater Rat	Manufacturer Part Number	CMF557M6800FKEB	
Through Hole ResistorsPackageAxialSeriesCMFResistance7.68 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyToleprature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-	Manufacturer	Vishay Dale	
PackageAxiaSeriesCMFResistance7.68 MOhmsTolerance±1%Power (Wats)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100pm/°CPackage / CaseAxialSupplier Device Package0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aunber of Terminations2Failure Rate-	Category	Resistors	
NumberNumberSeriesCMFResistance7.68 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Failure Rate-Failure Rate-Failure Rate-		Through Hole Resistors	
Resistance7.68 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-Statement-<	Package	Axial	
Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.090" Dia x 0.240" L (2.29mm x 6.10mm)Size / Dimension-Height - Seated (Max)2Number of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)- </td <td>Series</td> <td>CMF</td> <td></td>	Series	CMF	
Power (Watts)0.5W, 1/2WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.900" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-	Resistance	7.68 MOhms	
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$	
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W	
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film	
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C	
Supplier Device PackageAxialSize / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C	
Size / Dimension0.090" Dia x 0.240" L (2.29mm x 6.10mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial	
Number of Terminations2Failure Rate-	Size / Dimension	0.090" Dia x 0.240" L (2.29mm x 6.10mm)	
Failure Rate -	Height - Seated (Max)	-	
	Number of Terminations	2	
Report errors?	Failure Rate	-	
Report crois:			Report errors?

CMF557M6800FKEB Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF557M6800FKEB Payment Methods



If you have any question about CMF557M6800FKEB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com