


CMF602K3200FKR670

CMF602K3200FKR670 Information

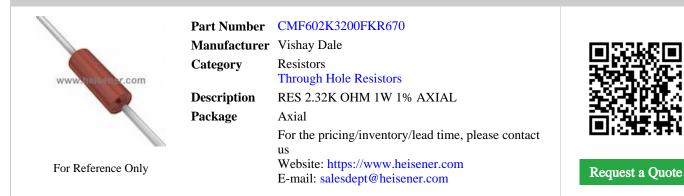

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF602K3200FKR670 Specifications

Manufacturer Part Number CMF602K3200FKR670 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF Resistance .32 kOhms Tolerance ±1% Power (Watts) Mtal Film Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature 4xial Supplier Device Package Axial Size / Dimension 0.415° Dia x 0.344° L (3.68mm x 8.74mm) Height - Seated (Max) - Number of Terminations 2 Failure Rate -		
CategoryResistorsPackageAxialPackageCMFResistance2.32 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialStier / Dimension0.145° Diax 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate1Failure Rate-Failure Rate- <tr< td=""><td>Manufacturer Part Number</td><td>CMF602K3200FKR670</td></tr<>	Manufacturer Part Number	CMF602K3200FKR670
Through Hole ResistorsPackageAxialSeriesCMFResistance2.32 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyToperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance2.32 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate- <t< td=""><td>Category</td><td>Resistors</td></t<>	Category	Resistors
SeriesCMFResistance2.32 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance2.32 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Area-	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	2.32 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF602K3200FKR670 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF602K3200FKR670 Payment Methods



If you have any question about CMF602K3200FKR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com