


## CMF603K8300FKR670

#### CMF603K8300FKR670 Information

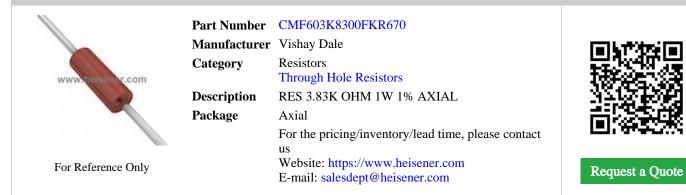

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### CMF603K8300FKR670 Specifications

Manufacturer Part NumberCMF603K8300FKR670ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance3.83 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFiame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-5°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialHeight - Seated (Max)-Height - Seated (Max)-		
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance3.83 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Manufacturer Part Number	CMF603K8300FKR670
Through Hole ResistorsPackageAxialSeriesCMFResistance3.83 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±10ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance3.83 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating TemperatureS5°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Category	Resistors
SeriesCMFResistance3.83 kOhmsTolerance±1%Power (Watts)1WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)		Through Hole Resistors
Resistance3.83 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Package	Axial
Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Resistance	3.83 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Power (Watts)	1W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Package / Case	Axial
	Supplier Device Package	Axial
Height - Seated (Max) -	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
-	Height - Seated (Max)	-
Number of Terminations 2	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

#### CMF603K8300FKR670 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### CMF603K8300FKR670 Payment Methods



If you have any question about CMF603K8300FKR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com