


CMF603R0900FKR6

CMF603R0900FKR6 Information

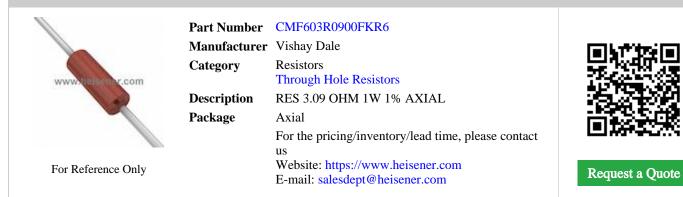

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF603R0900FKR6 Specifications

Manufacturer Part NumberCMF603R0900FKR6ManufacturerVishay DaleCategoryResistorsCategoryThrough Hole ResistorsPackageAxialSeriesCMF6SeriesCMFResistance3.09 OhmsTolerance±1%Power (Watts)Meal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures±100ppm/°CTonperature Coefficient±100ppm/°CPackage / CaseAxial
CategoryResistorsCategoryResistorsPackageAxialPackageCMFResistance3.09 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxial
For a constraint of the sensitionsPackageAxialSeriesCMFResistance3.09 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
PackageAxialSeriesCMFResistance3.09 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
SeriesCMFResistance3.09 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Resistance3.09 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxial
Operating Temperature-55°C ~ 175°CPackage / CaseAxial
Package / Case Axial
Supplier Device Package Axial
Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Height - Seated (Max) -
Number of Terminations 2
Failure Rate -
Report errors [*]

CMF603R0900FKR6 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF603R0900FKR6 Payment Methods



If you have any question about CMF603R0900FKR6, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com