


CMF6041K200FKRE70

CMF6041K200FKRE70 Information

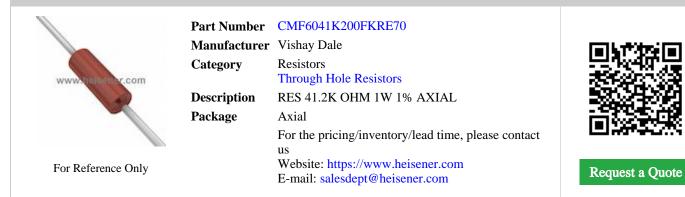

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6041K200FKRE70 Specifications

Manufacturer Part Number CMF6041K200FKRE70 Manufacturer Vishay Dale Category Resistors Category Through Hole Resistors Package Axial Series CMF6041K200FKRE70 Package Axial Series CMF Resistance 41.2 KOhms Tolerance ±1% Power (Watts) Metal Film Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Poperature Coefficient ±100ppm/°C Opparting Temperature -55°C ~ 175°C Package / Case Axial Supplier Device Package Axial Size / Dimension 0.145° Dia x 0.344" L (3.68mm x 8.74mm) Height - Seated (Max) - Number of Terminations 2 Failure Rate -		
CategoryResCategoryThrough Hole ResistorsPackageAxialPackageCMFResistance41.2 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure R	Manufacturer Part Number	CMF6041K200FKRE70
Initial EntropyThrough Hole ResistorsPackageAxialSeriesCMFResistance41.2 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyToleranture Coefficient±100ppn/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance41.2 kOhmsTolerance±1%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Anumber of Terminations2Failure Rate-Failure Rate-	Category	Resistors
SeriesCMFResistance41.2 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance41.2 kOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Failure Rate </td <td>Package</td> <td>Axial</td>	Package	Axial
Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Failure Rate-Composition<	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-	Resistance	41.2 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.145" Dia x 0.344" L (3.68mm x 8.74mm)Failure Rate-Output-State (Max)-State (Max)-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
*		Report errors?

CMF6041K200FKRE70 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6041K200FKRE70 Payment Methods



If you have any question about CMF6041K200FKRE70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com