


CMF60499K00BHEA

CMF60499K00BHEA Information

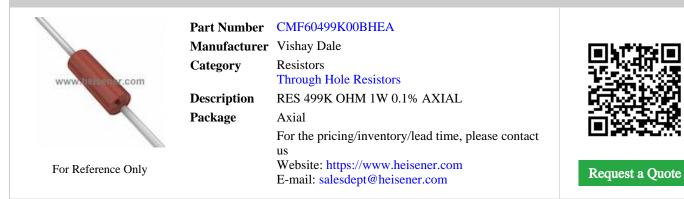

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF60499K00BHEA Specifications

Manufacturer Part NumberCMF60499K00BHEAManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance499 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPorer ficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)		
CategoryResistorsCategoryThrough Hole ResistorsPackageAxialPackageCMFResistance499 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Manufacturer Part Number	CMF60499K00BHEA
Through Hole ResistorsPackageAxialSeriesCMFResistance499 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Manufacturer	Vishay Dale
PackageAxialPackageCMFResistance499 kOhmsTolerance±0.1%Power (Watts)1WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Category	Resistors
SeriesCMFResistance499 kOhmsTolerance±0.1%Power (Watts)1WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)		Through Hole Resistors
Resistance499 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPreperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Package	Axial
Tolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Resistance	499 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Power (Watts)	1W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm)	Package / Case	Axial
	Supplier Device Package	Axial
	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Height - Seated (Max) -	Height - Seated (Max)	-
Number of Terminations 2	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

CMF60499K00BHEA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE ELARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF60499K00BHEA Payment Methods



If you have any question about CMF60499K00BHEA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com