


CMF605K1700BER670

CMF605K1700BER670 Information

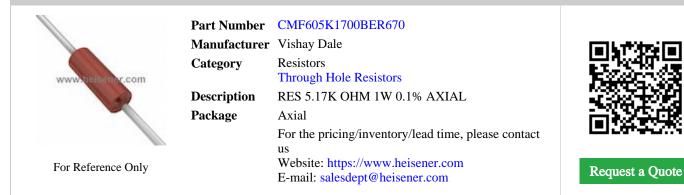

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF605K1700BER670 Specifications

Manufacturer Part Number CMF605K1700BER670 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF Resistance 5.17 kOhms Tolerance ±0.1% Power (Watts) Wu Composition Metal Film Features Fame Retardant Coating, Moisture Resistant, Safety Power (Vatts) 4xial Operating Temperature 4xial Soft C 175°C 4xial Supplier Device Package Axial Size / Dimension 0.145° Dia x 0.344" k (3.68mm x 8.74mm) Height - Seated (Max) 2 Number of Terminations 2 Failure Rate -		
CategoryResistorsPackageAxialPackageCMFResistance5.17 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTolerance±0.5°C ~ 175°COperating TemperatureAxialSuppler Device PackageAxialStard, Ciased (Max)- 5°C ~ 105°CStard, Ciased (Max)- 5°C ~ 105°CStard, Dimension3.145° Dia x 0.344° L (3.68mm x 8.74mm)Height - Seated (Max)-Stard, Partentions2Failure Rate-Failure Rate- <t< td=""><td>Manufacturer Part Number</td><td>CMF605K1700BER670</td></t<>	Manufacturer Part Number	CMF605K1700BER670
Through Hole ResistorsPackageAxialSeriesCMFResistance5.17 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance5.17 kOhmsTolerance±0.1%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±25ppm/°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate2	Category	Resistors
SeriesCMFResistance5.17 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate- <tr< td=""><td></td><td>Through Hole Resistors</td></tr<>		Through Hole Resistors
Resistance5.17 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate </td <td>Package</td> <td>Axial</td>	Package	Axial
Tolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Stey / Dimension-Height - Seated (Max)2Aumber of Terminations0.145° Dia x 0.144" L (3.68mm x 8.74mm)Failure Rate-Stey Package-Stey Package <t< td=""><td>Series</td><td>CMF</td></t<>	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	5.17 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 0.1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures#25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±25ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

CMF605K1700BER670 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF605K1700BER670 Payment Methods



If you have any question about CMF605K1700BER670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com