


# CMF605K6000JNEB64

### CMF605K6000JNEB64 Information

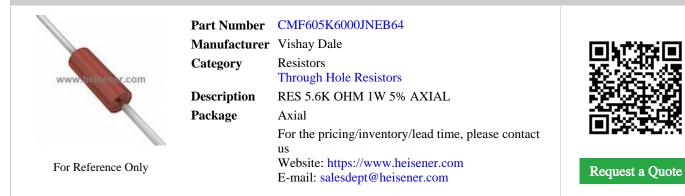

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## CMF605K6000JNEB64 Specifications

Manufacturer Part Number CMF605K6000JNEB64   Manufacturer Vishay Dale   Category Resistors   Through Hole Resistors Through Hole Resistors   Package Axial   Series CMF   Resistance 5.6 kOhms   Tolerance 5.6 kOhms   Power (Watts) Mcda Film   Yomposition Mcda Film   Features Fame Retardant Coating, Moisture Resistant, Safety   Poper Age (Case Axial   Step / Case Axial   Step / Case Axial   Number of Terminations 2   Mumber of Terminations 2   Failure Rate -		
CategoryResistorsPackageAxialPackageCMFResistance5.6 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.145° Diax 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Anial-Starder (Max)1Size / Dimension2Anial-Starder (Max)-Starder (Max)- <td>Manufacturer Part Number</td> <td>CMF605K6000JNEB64</td>	Manufacturer Part Number	CMF605K6000JNEB64
Through Hole ResistorsPackageAxialSeriesCMFResistance5.6 kOhmsTolerance±5%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145° Diax 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance5.6 kOhmsTolerance±5%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±5°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Pailure Rate-Failure Rate-Fail	Category	Resistors
Series CMF   Resistance 5.6 kOhms   Tolerance ±5%   Power (Watts) IW   Composition Metal Film   Features Flame Retardant Coating, Moisture Resistant, Safety   Operating Temperature ±200ppm/°C   Operating Temperature Axial   Supplier Device Package Axial   Size / Dimension 0.145" Dia x 0.344" L (3.68mm x 8.74mm)   Height - Seated (Max) 2   Number of Terminations 2   Failure Rate -		Through Hole Resistors
Resistance5.6 kOhmsTolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-State Composition-State Composition- </td <td>Package</td> <td>Axial</td>	Package	Axial
Tolerance±5%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Area-	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	5.6 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Tolerance	±5%
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures±200ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Power (Watts)	1W
Temperature Coefficient±200pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±200ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

#### CMF605K6000JNEB64 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### CMF605K6000JNEB64 Payment Methods



If you have any question about CMF605K6000JNEB64, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com