


CMF6062R000FKRE64

CMF6062R000FKRE64 Information

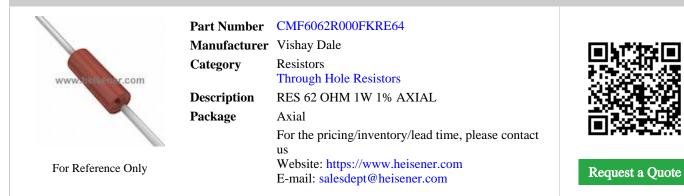

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6062R000FKRE64 Specifications

| Manufacturer Part Number CMF6062R000FKRE64 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF Resistance 62 Ohms Torough Hole Resistor Softward Power (Watts) 4W Composition Metal Film Features Fame Retardant Coating, Moisture Resistant, Safety Pokage / Case Axial Supplier Device Package Axial Size / Dimension 0.145° Dia x 0.344" L (3.68mm x 8.74mm) Height - Seated (Max) 2 Number of Terminations 2 Failure Rate - | | |
|--|--------------------------|---|
| CategoryResistorsPackageAxialPackageCMFResistance62 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Anial-Stare for Errentions2Failure Rate-Failure Rate-Stare for Errentions-Stare for Errentions-Star | Manufacturer Part Number | CMF6062R000FKRE64 |
| Through Hole ResistorsPackageAxialSeriesCMFResistance62 OhmsTolerance±1%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate- | Manufacturer | Vishay Dale |
| PackageAxiaSeriesCMFResistance62 OhnsTolerance±1%Power (Wats)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Failure Rate-Failure Rate2 | Category | Resistors |
| SeriesCMFResistance62 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate- | | Through Hole Resistors |
| Resistance62 OhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Stafe Rat | Package | Axial |
| Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Area-State Seated (Max)-State Seat | Series | CMF |
| Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate- | Resistance | 62 Ohms |
| CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate- | Tolerance | $\pm 1\%$ |
| FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate- | Power (Watts) | 1W |
| Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Composition | Metal Film |
| Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Features | Flame Retardant Coating, Moisture Resistant, Safety |
| Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Temperature Coefficient | ±100ppm/°C |
| Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Operating Temperature | -55°C ~ 175°C |
| Number of Terminations0.145" Dia x 0.344" L (3.68mm x 8.74mm)Failure Rate-Output-State (Max)-State (Max)- | Package / Case | Axial |
| Height - Seated (Max)-Number of Terminations2Failure Rate- | Supplier Device Package | Axial |
| Number of Terminations2Failure Rate- | Size / Dimension | 0.145" Dia x 0.344" L (3.68mm x 8.74mm) |
| Failure Rate - | Height - Seated (Max) | - |
| | Number of Terminations | 2 |
| Report errors? | Failure Rate | - |
| | | Report errors? |

CMF6062R000FKRE64 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6062R000FKRE64 Payment Methods



If you have any question about CMF6062R000FKRE64, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com