


# CMF606M6500FHBF

## **CMF606M6500FHBF Information**

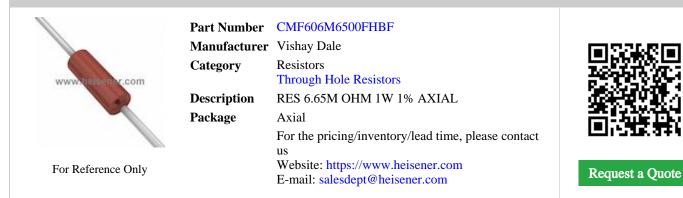

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# CMF606M6500FHBF Specifications

<table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container>		
CategoryResionsCategoryThrough Hole ResistorsPackageAxialPackageCMFResistance6.65 MOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Manufacturer Part Number	CMF606M6500FHBF
Through Hole ResistorsPackageAxialSeriesCMFResistance6.65 MOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance6.65 MOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Category	Resistors
SeriesCMFResistance6.65 MOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±50ppm/°COperating Temperature55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-		Through Hole Resistors
Resistance6.65 MOhmsTolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Package	Axial
Tolerance±1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Coefficient±50pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Series	CMF
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Resistance	6.65 MOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Power (Watts)	1W
Temperature Coefficient±50ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-	Package / Case	Axial
Height - Seated (Max) -	Supplier Device Package	Axial
-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)
Number of Terminations 2	Height - Seated (Max)	-
	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

### **CMF606M6500FHBF** Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### CMF606M6500FHBF Payment Methods



If you have any question about CMF606M6500FHBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com