


CMF6075K000BEBF

CMF6075K000BEBF Information

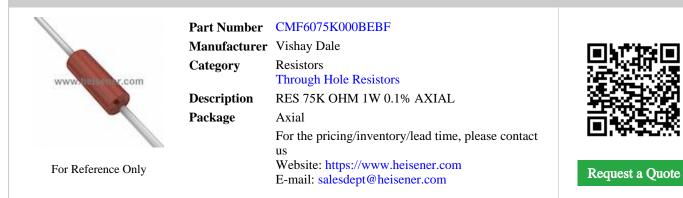

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6075K000BEBF Specifications

Manufacturer Part NumberCMF6075K000BEBFManufacturerVishay DaleCategoryResistorsCategoryThrough Hole ResistorsPackageAxialSeriesCMFResistance75 KOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoreating Temperature Coefficient±25pm°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Number of Terminations2			
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance75 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±25pm/°COperating Temperature55°C ~ 175°CPackage / CaseAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate- <td>Manufacturer Part Number</td> <td>CMF6075K000BEBF</td> <td></td>	Manufacturer Part Number	CMF6075K000BEBF	
Through Hole ResistorsPackageAxialSeriesCMFResistance75 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Manufacturer	Vishay Dale	
PackageAxiaSeriesCMFResistance75 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-Failure Rate-	Category	Resistors	
SeriesCMFResistance75 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors	
Resistance75 kOhmsTolerance±0.1%Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate <td>Package</td> <td>Axial</td> <td></td>	Package	Axial	
Tolerance#0.1%Power (Wats)IWCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient#25pm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.14s" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max).Aumber of Terminations2Failure Rate.Failure Rate.State Max.State Max <td>Series</td> <td>CMF</td> <td></td>	Series	CMF	
Power (Watts)IWCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Failure Rate2	Resistance	75 kOhms	
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	±0.1%	
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures£25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1W	
Temperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Composition	Metal Film	
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±25ppm/°C	
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C	
Size / Dimension0.145" Dia x 0.344" L (3.68mm x 8.74mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial	
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.344" L (3.68mm x 8.74mm)	
Failure Rate -	Height - Seated (Max)	-	
	Number of Terminations	2	
	Failure Rate	-	
Report errors?			Report errors?

CMF6075K000BEBF Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6075K000BEBF Payment Methods



If you have any question about CMF6075K000BEBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com