

# **CMF6517K800BEBF**

#### CMF6517K800BEBF Information

Contract terrors cante terr	Part Number	CMF6517K800BEBF	
	Manufacturer	Vishay Dale	<b>1815</b> 72
	Category	Resistors Through Hole Resistors	
	Description	RES 17.8K OHM 1.5W 0.1% AXIAL	17104
	Package	Axial	
		For the pricing/inventory/lead time, please contact us	وتعالها
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



t a Quote

## CMF6517K800BEBF Specifications

Manufacturer Part NumberCMF6517K800BEBFManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance17.8 kOhmsTolerance±0.1%Power (Watts)StolFeaturesMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature±55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2		
CategoryResistorsPackageAxialPackageCMFResistance17.8 kOhmsTolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2	Manufacturer Part Number	CMF6517K800BEBF
Frough Hole ResistorsPackageAxialSeriesCMFResistance17.8 kOhmsTolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance17.8 kOhmsTolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialHeight - Seated (Max)-Number of Terminations2	Category	Resistors
SeriesCMFResistance17.8 kOhmsTolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2		Through Hole Resistors
Resistance17.8 kOhmsTolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2	Package	Axial
Tolerance±0.1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2	Series	CMF
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Resistance	17.8 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient $\pm 25pm/^{\circ}C$ Operating Temperature $-55^{\circ}C \sim 175^{\circ}C$ Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max) $-$ Number of Terminations2	Tolerance	±0.1%
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Power (Watts)	1.5W
Temperature Coefficient±25pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Temperature Coefficient	±25ppm/°C
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.180" Dia x 0.562" L (4.57mm x 14.27mm)   Height - Seated (Max) -   Number of Terminations 2	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2	Supplier Device Package	Axial
Number of Terminations 2	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)
	Height - Seated (Max)	-
	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

#### **CMF6517K800BEBF** Guarantees



**Quality Guarantees** 


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### CMF6517K800BEBF Payment Methods

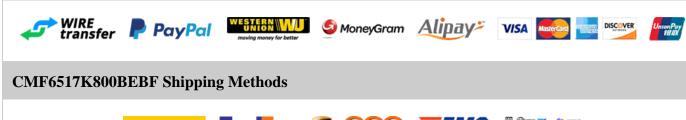



If you have any question about CMF6517K800BEBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com