


CMF65182R00FKR670

CMF65182R00FKR670 Information

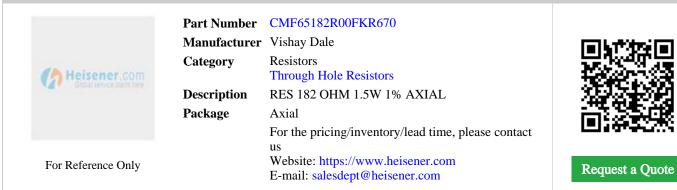

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF65182R00FKR670 Specifications

Manufacturer Part NumberCMF65182R00FKR670ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance182 OhmsTolerance±1%Power (Watts).5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature.5°C ~ 175°CPackage / CaseAxialSize / Dimension.108° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max).Number of Terminations2Number of Terminations.Resconserter.Composition.Size / Dimension.Size / Dimension. </th <th></th> <th></th>		
CategoryResistorsPackageAxialPackageAxialSeriesCMFResistance182 OhmsTolerance±1%Power (Watts)I.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-<	Manufacturer Part Number	CMF65182R00FKR670
Through Hole ResistorsPackageAxialPackageCMFResistance182 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyToperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Failure Rate-Failure Rate-<	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance182 OhmsTolerance±1%Power (Wats)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Anuber of Terminations2Failure Rate-	Category	Resistors
SeriesCMFResistance182 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance182 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Areal-Aumber of Terminations-Other Seated (Max)-Aumber of Terminations-Other Seated (Max)-Aumber of Terminations-Aumber of Term	Series	CMF
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Autence-Autence-	Resistance	182 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1.5W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Number of Terminations0.180" Dia x 0.562" L (4.57mm x 14.27mm)Failure Rate-Output-State- <td>Package / Case</td> <td>Axial</td>	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Papert arrors?	Failure Rate	-
Report errors:		Report errors

CMF65182R00FKR670 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF65182R00FKR670 Payment Methods





If you have any question about CMF65182R00FKR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com