


CMF6545R300FKR611

CMF6545R300FKR611 Information

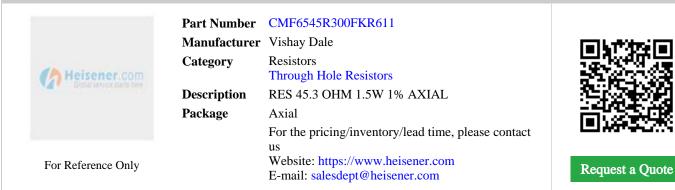

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6545R300FKR611 Specifications

Manufacturer Part Number CMF6545R300FKR611 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series CMF Resistance 45.3 Ohns Tolerance ±1% Power (Watts) 1.5W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operature Coefficient ±100ppm/°C Operature Coefficient Axial Supplier Device Package Axial Size / Dimension 0.180° Dia x 0.562° L (4.57mm x 14.27mm) Height - Seated (Max) 2 Number of Terminations 2 Package / Case -		
CategoryResistorsPackageAxialPackageCMFResistance45.3 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.180° Diax 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Anishor Compositions1.81° Diax 0.562° L (4.57mm x 14.27mm)	Manufacturer Part Number	CMF6545R300FKR611
Through Hole ResistorsPackageAxialSeriesCMFResistance45.3 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTomperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance45.3 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Anumber of Terminations2Failure Rate-	Category	Resistors
Series CMF Resistance 45.3 Ohms Tolerance ±1% Power (Watts) 1.5W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Operating Temperature ±100ppm/°C Operating Temperature -55°C ~ 175°C Package / Case Axial Supplier Device Package 0.180° Dia x 0.562° L (4.57mm x 14.27mm) Height - Seated (Max) 2 Number of Terminations 2 Failure Rate -		Through Hole Resistors
Resistance45.3 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Areal-Aumber of Terminations-Other Seated (Max)-Aumber of Terminations-Other Seated (Max)-Aumber of Terminations-Aumber of Term	Series	CMF
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Resistance	45.3 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Power (Watts)	1.5W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	$\pm 100 ppm/^{\circ}C$
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
Report circlis.		Report errors?

CMF6545R300FKR611 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

CMF6545R300FKR611 Payment Methods





If you have any question about CMF6545R300FKR611, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com