


CMF6571K500FKRE70

CMF6571K500FKRE70 Information

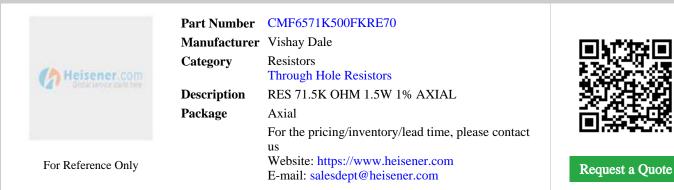

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CMF6571K500FKRE70 Specifications

Manufacturer Part Number CMF6571K500FKRE70 Manufacturer Vishay Dale Category Resistors Category Through Hole Resistors Package Axial Series CMF Resistance 7.15 Kohms Tolerance ±1% Power (Watts) 1.5W Composition Metal Film Features Flame Retardant Coating, Moisture Resistant, Safety Package / Case Axial Supplier Device Package Axial Size / Dimension 0.180° Dia x 0.562° L (4.57mm x 14.27mm) Height - Seated (Max) 2 Number of Terminations 2			
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance1.5 KOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100pm/°COperating Temperature-55°C ~175°CPackage / CaseAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate-<	Manufacturer Part Number	CMF6571K500FKRE70	
Through Hole ResistorsPackageAxialSeriesCMFResistance71.5 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Manufacturer	Vishay Dale	
PackageAxiaSeriesCMFResistance71.5 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate- <td< td=""><td>Category</td><td>Resistors</td><td></td></td<>	Category	Resistors	
NumberSeriesCMFResistance71.5 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors	
Resistance71.5 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rat	Package	Axial	
Tolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-Stater Sea	Series	CMF	
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Failure Rate2	Resistance	71.5 kOhms	
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$	
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	1.5W	
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Composition	Metal Film	
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C	
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C	
Size / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial	
Number of Terminations2Failure Rate-	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)	
Failure Rate -	Height - Seated (Max)	-	
	Number of Terminations	2	
Report errors?	Failure Rate	-	
Report chois.			Report errors?

CMF6571K500FKRE70 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CMF6571K500FKRE70 Payment Methods



If you have any question about CMF6571K500FKRE70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com