


# CMF657R2300FKBF

#### CMF657R2300FKBF Information

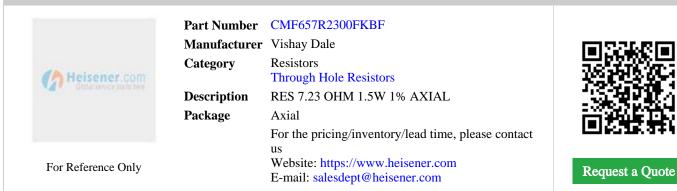

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### CMF657R2300FKBF Specifications

Manufacturer Part NumberCMF657R2300FKBFManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance7.23 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2		
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance7.23 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperating Temperature-55°C ~ 175°CPackage / CaseAxialStupplier Device PackageAialHeight - Seated (Max)-	Manufacturer Part Number	CMF657R2300FKBF
FindThrough Hole ResistorsPackageAxialSeriesCMFResistance7.23 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature>55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-	Manufacturer	Vishay Dale
PackageAxialSeriesCMFResistance7.23 OhmsTolerance±1%Power (Wats)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Category	Resistors
SeriesCMFResistance7.23 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-		Through Hole Resistors
Resistance7.23 OhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Package	Axial
Tolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyPoperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Series	CMF
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Resistance	7.23 Ohms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Power (Watts)	1.5W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-	Operating Temperature	-55°C ~ 175°C
Size / Dimension 0.180" Dia x 0.562" L (4.57mm x 14.27mm)   Height - Seated (Max) -	Package / Case	Axial
Height - Seated (Max) -	Supplier Device Package	Axial
	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)
Number of Terminations 2	Height - Seated (Max)	-
	Number of Terminations	2
Failure Rate -	Failure Rate	-
Report errors?		Report errors?

#### CMF657R2300FKBF Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# CMF657R2300FKBF Payment Methods



If you have any question about CMF657R2300FKBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com