


# CMF658K6600FKR670

#### CMF658K6600FKR670 Information

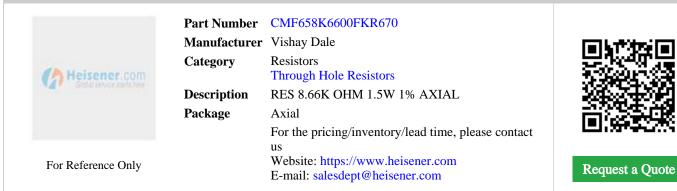

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# CMF658K6600FKR670 Specifications

Manufacturer Part NumberCMF658K6600FKR670ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesCMFResistance8.66 KohmsTolerance±1%Power (Watts)J.5WCompositionMetal FilmFeaturesFalme Retardant Coating, Moisture Resistant, SafetyPoper Age (Case)AxialSupplier Device PackageAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Falure Ret1.50° Control (Maxing Retards 14.27mm)Size / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Size / Dimensions2Size / Dimensions2Si		
CategoryResistorsPackageAxialPackageCMFResistance8.66 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature-55°C ~ 175°CPackage / CaseAxialSize / Dimension0.180° Diax 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Anial-Starler Retardant Coating Attage-Size / Dimension0.180° Diax 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Sunder Greminations2Failure Rate-Failure Rate	Manufacturer Part Number	CMF658K6600FKR670
Through Hole ResistorsPackageAxialSeriesCMFResistance8.66 kOhmsTolerance±1%Power (Wats)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesCMFResistance8.66 kOhmsTolerance±1%Power (Wats)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-	Category	Resistors
SeriesCMFResistance8.66 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance8.66 kOhmsTolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Ra	Package	Axial
Tolerance±1%Power (Watts)1.5WCompositionMetal FilmFeaturesFame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device Package0.180° Dia x 0.562° L (4.57mm x 14.27mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Area-State Seated (Max)-State S	Series	CMF
Power (Watts)1.5WCompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Faiure Rate-	Resistance	8.66 kOhms
CompositionMetal FilmFeaturesFlame Retardant Coating, Moisture Resistant, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, Moisture Resistant, SafetyFeatures±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Power (Watts)	1.5W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, Moisture Resistant, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 175°C
Size / Dimension0.180" Dia x 0.562" L (4.57mm x 14.27mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.180" Dia x 0.562" L (4.57mm x 14.27mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

#### CMF658K6600FKR670 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## CMF658K6600FKR670 Payment Methods



If you have any question about CMF658K6600FKR670, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com