

CPCC021R000JE66

CPCC021R000JE66 Information



For Reference Only

Part Number	CPCC021R000JE66	
Manufacturer	Vishay Dale	
Category	Resistors Through Hole Resistors	
Description	RES 1 OHM 2W 5% RADIAL	
Package	Radial	
	For the pricing/inventory/lead time, please contact	
us		
	Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



CPCC021R000JE66 Specifications

Manufacturer Part Number CPCC021R000JE66 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Radial Series CPCC Resistance 1 Ohms Tolerance ±5% Power (Watts) 2W Composition Wirewound Features Flame Proof, Safety Temperature Coefficient ±400ppm/°C Operating Temperature -65°C ~ 275°C Package / Case Radial Lead Size / Dimension 0.433" L x 0.276" W (11.00mm x 7.00mm) Height - Seated (Max) 0.807" (20.50mm) Number of Terminations 2 Failure Rate -		
CategoryResistorsPackageRadialPackageRadialSeriesCPCCResistance1 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±400ppm/°COperating Temperature65°C ~ 275°CPackage / CaseRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Manufacturer Part Number	CPCC021R000JE66
Through Hole ResistorsPackageRadialSeriesCPCCResistance1 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyOperating Temperature-65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height + Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Manufacturer	Vishay Dale
PackageRadiaSeriesCPCCResistance1 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyOperating Temperaturee5°°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433° L x 0.276° W (11.00mm x 7.00mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate- </td <td>Category</td> <td>Resistors</td>	Category	Resistors
SeriesCPCCResistance1 OhmsTolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±400pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-		Through Hole Resistors
Resistance1 OhmsTolerance 5% Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient $400pm^{\circ}C$ Operating Temperature $-55^{\circ}C \sim 275^{\circ}C$ Package / CaseRadial LeadSupplier Device Package $0.433^{\circ} L x 0.276^{\circ} W (11.00mm x 7.00mm)$ Height - Seated (Max) $0.807^{\circ} (20.50mm)$ Number of Terminations 2 Failure Rate $-$	Package	Radial
Tolerance±5%Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±400pm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Series	CPCC
Power (Watts)2WCompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±400ppm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadial LeadSupplier Device Package0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Resistance	1 Ohms
CompositionWirewoundFeaturesFlame Proof, SafetyTemperature Coefficient±400ppm°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Tolerance	$\pm 5\%$
FeaturesFlame Proof, SafetyTemperature Coefficient±400ppm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Power (Watts)	2W
Temperature Coefficient±400ppm/°COperating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Composition	Wirewound
Operating Temperature-65°C ~ 275°CPackage / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Features	Flame Proof, Safety
Package / CaseRadialSupplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Temperature Coefficient	±400ppm/°C
Supplier Device PackageRadial LeadSize / Dimension0.433" L x 0.276" W (11.00mm x 7.00mm)Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Operating Temperature	-65°C ~ 275°C
Number of Terminations0.433" L x 0.276" W (11.00mm x 7.00mm)Failure Rate0.807" (20.50mm)Failure Rate-	Package / Case	Radial
Height - Seated (Max)0.807" (20.50mm)Number of Terminations2Failure Rate-	Supplier Device Package	Radial Lead
Number of Terminations2Failure Rate-	Size / Dimension	0.433" L x 0.276" W (11.00mm x 7.00mm)
Failure Rate -	Height - Seated (Max)	0.807" (20.50mm)
	Number of Terminations	2
Report errors	Failure Rate	-
•		Report error

CPCC021R000JE66 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

CPCC021R000JE66 Payment Methods

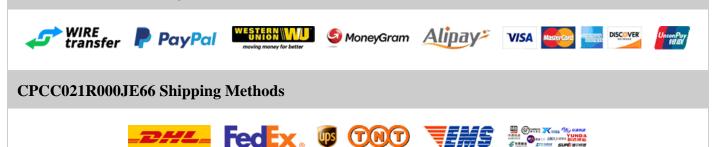

If you have any question about CPCC021R000JE66, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com