

DAO3W3P700G30LF

DAO3W3P700G30LF Information

Heisener.com	DAO3W3P700G30LF Amphenol FCI Connectors, Interconnects D-Sub Connectors CONN D-SUB PLUG 3POS R/A SOLDER - For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DAO3W3P700G30LF Specifications

Manufacturer Amphenol FCI Connectors, Interconnects D-Sub Connectors Package - Series DW Connector Style D-Sub, Combo Connector Type Plug, Male Pins Number of Positions 3 (Power) Number of Rows 1 Shell Size, Connector Layout 2 (DA, A) - 3W3 Contact Type Power Mounting Type Pough Hole, Right Angle Flange Feature Board Side (4-40) Features Board Lock, Grounding Indents, Mounting Brackets Shell Material, Finish Steel, Tin Plated Contact Finish Thickness - Ingress Protection -		
CategoryConnectors, InterconnectsD-Sub ConnectorsPackage-SeriesDWConnector StyleD-Sub, ComboConnector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypePowerFlange FeatureBoard Side (4-40)FeaturesSolderShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Manufacturer Part Number	DAO3W3P700G30LF
D-Sub ConnectorsPackage-SeriesDWConnector StyleD-Sub, ComboConnector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)Shell Material, FinishSteel, Tin PlatedContact Finish Thickness-Contact Finish Thickness-Material Flammability RatingUL94 V-0	Manufacturer	Amphenol FCI
Package-SeriesDWConnector StyleD-Sub, ComboConnector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)FeaturesSolderShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Category	Connectors, Interconnects
SeriesDWConnector StyleD-Sub, ComboConnector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)FeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0		D-Sub Connectors
Connector StyleD-Sub, ComboConnector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Package	-
Connector TypePlug, Male PinsNumber of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleBoard Side (4-40)SolderFlange FeatureBoard Side (4-40)FeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Series	DW
Number of Positions3 (Power)Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Connector Style	D-Sub, Combo
Number of Rows1Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Connector Type	Plug, Male Pins
Shell Size, Connector Layout2 (DA, A) - 3W3Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Number of Positions	3 (Power)
Contact TypePowerMounting TypeThrough Hole, Right AngleFlange FeaturesBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Number of Rows	1
Mounting TypeThrough Hole, Right AngleFlange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Shell Size, Connector Layout	2 (DA, A) - 3W3
Flange FeatureBoard Side (4-40)TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Contact Type	Power
TerminationSolderFeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Mounting Type	Through Hole, Right Angle
FeaturesBoard Lock, Grounding Indents, Mounting BracketsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Flange Feature	Board Side (4-40)
Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Termination	Solder
Contact FinishGoldContact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Features	Board Lock, Grounding Indents, Mounting Brackets
Contact Finish Thickness-Ingress Protection-Material Flammability RatingUL94 V-0	Shell Material, Finish	Steel, Tin Plated
Ingress Protection-Material Flammability RatingUL94 V-0	Contact Finish	Gold
Material Flammability Rating UL94 V-0	Contact Finish Thickness	-
	Ingress Protection	-
Report errors?	Material Flammability Rating	UL94 V-0
		Report errors?

DAO3W3P700G30LF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DAO3W3P700G30LF Payment Methods

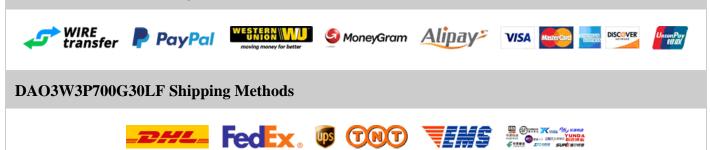

If you have any question about DAO3W3P700G30LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com