

DCM-8

DCM-8 Information



For Reference Only

Part Number	DCM-8	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 8A 600VAC/VDC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DCM-8 Specifications

ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageSAG, 10mm x 38.1mmSeriesSAG, 10mm x 38.1mmSeriesCatridgeCurrent RatingCatridgeVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)		
CategoryCircuit ProtectionBeckageElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesDCMFuse TypeCartridgeCurrent Rating8AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature100kA AC, 50kA DCBreaking Capacity @ Rated Voltage5AG, 10mm x 38.1mmSize / Dimension5AG, 10mm x 38.10mm)	Manufacturer Part Number	DCM-8
ConstraintElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesDCMFuse TypeCartridgeCurrent Rating8AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer	Eaton
Package5AG, 10mm x 38.1mmSeriesDCMFuse TypeCartridgeCurrent Rating8AVoltage Rating - AC600VVoltage Rating - DC600VKesponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Type100kA AC, 50kA DCBreaking Capacity @ Rated Voltage100kA AC, 50kA DCPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Category	Circuit Protection
Series DCM Fuse Type Cartridge Current Rating 8A Voltage Rating - AC 600V Voltage Rating - DC 600V Response Time Fast Applications Electrical, Industrial Features - Class - Approvals CSA, UL Operating Temperature - Breaking Capacity @ Rated Voltage 100kA AC, 50kA DC Mounting Type FAG, 10mm x 38.1mm Package / Case 0.406" Dia x 1.500" L (10.30mm x 38.10mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating8AVoltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Diax 1.500" L (10.30mm x 38.10mm)	Package	5AG, 10mm x 38.1mm
Current Rating8ACurrent Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Series	DCM
Voltage Rating - AC600VVoltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Fuse Type	Cartridge
Voltage Rating - DC600VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Current Rating	8A
Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - DC	600V
Features-Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Response Time	Fast
Class-ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Applications	Electrical, Industrial
ApprovalsCSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Class	-
Breaking Capacity @ Rated Voltage100kA AC, 50kA DCMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Approvals	CSA, UL
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Operating Temperature	-
Package / Case 5AG, 10mm x 38.1mm Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Breaking Capacity @ Rated Voltage	100kA AC, 50kA DC
Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.500" L (10.30mm x 38.10mm)
1		Report errors?

DCM-8 Guarantees

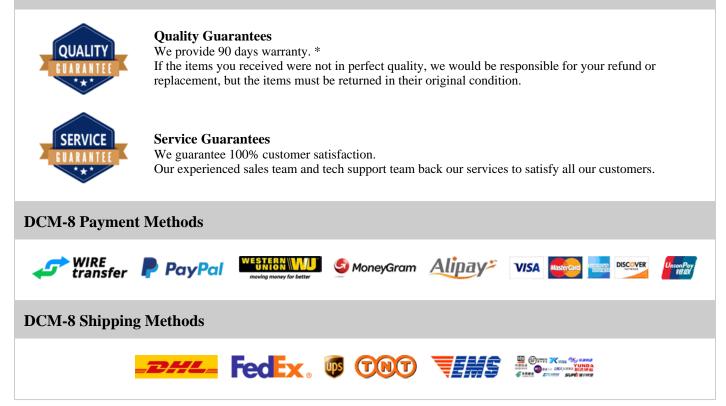

If you have any question about DCM-8, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com