

# DF11CZ-22DS-2V(52)

## DF11CZ-22DS-2V(52) Information

| Heisener.com       | DF11CZ-22DS-2V(52)<br>Hirose Electric Co Ltd<br>Connectors, Interconnects<br>Rectangular Connectors - Headers, Receptacles,<br>Female Sockets<br>CONN SOCKET 22POS |                 |
|--------------------|--|-----------------|
| For Reference Only | For the pricing/inventory/lead time, please contact us   |                 |
|                    | Website: https://www.heisener.com<br>E-mail: salesdept@heisener.com  | Request a Quote |

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## DF11CZ-22DS-2V(52) Specifications

| Manufacturer Part Number          | DF11CZ-22DS-2V(52)  |
|-----------------------------------|---|
| Manufacturer                      | Hirose Electric Co Ltd  |
| Category                          | Connectors, Interconnects                                     |
|                                   | Rectangular Connectors - Headers, Receptacles, Female Sockets |
| Package                           | -   |
| Series                            | DF11  |
| Connector Type                    | Receptacle  |
| Contact Type                      | Female Socket   |
| Style                             | Board to Board or Cable                                       |
| Number of Positions               | 22  |
| Number of Positions Loaded        | All   |
| Pitch - Mating                    | 0.079" (2.00mm)   |
| Number of Rows                    | 2   |
| Row Spacing - Mating              | 0.079" (2.00mm)   |
| Mounting Type                     | Surface Mount   |
| Termination                       | Solder  |
| Fastening Type                    | Friction Lock   |
| Contact Finish - Mating           | Gold  |
| Contact Finish Thickness - Mating | 8µin (0.20µm)   |
| Insulation Color                  | Beige   |
| Insulation Height                 | 0.234" (5.95mm)   |
| Contact Length - Post             | -   |
| Operating Temperature             | -30°C ~ 85°C  |
| Material Flammability Rating      | UL94 V-0  |
|                                   |   |

| Contact Finish - Post  | Tin                              |
|------------------------|----------------------------------|
| Mated Stacking Heights | 7.55mm, 8.2mm                    |
| Ingress Protection     | -                                |
| Features               | Pick and Place, Solder Retention |
|                        |                                  |

Report errors?

#### DF11CZ-22DS-2V(52) Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### DF11CZ-22DS-2V(52) Payment Methods

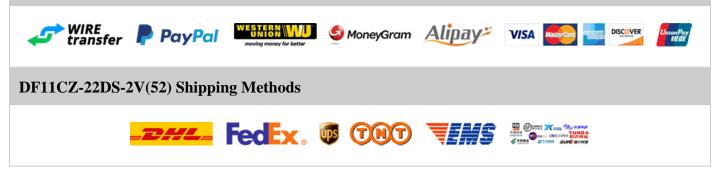

If you have any question about DF11CZ-22DS-2V(52), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com