

DF38A-30S-0.3V(51)

DF38A-30S-0.3V(51) Information

		DF38A-30S-0.3V(51) Hirose Electric Co Ltd	
www.etcure.com	ategory	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
De	escription	CONN RCPT 0.3MM 30POS SMD	
Pa	ackage	-	回發感激
		For the pricing/inventory/lead time, please contact us	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DF38A-30S-0.3V(51) Specifications

Manufacturer Part NumberDF38A-30S-0.3V(51)ManufacturerHirose Electric Co LtdCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDF38Connector TypeReceptacles, Ceceptacles, Female SocketsContact TypeReceptacleContact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1TerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Fleight0.059" (1.50mm)Contact Length - Post-Contact Length - Pos		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDF38Connector TypeReceptacleContact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllNumber of Rows1Number of Rows1Number of RowsSolderNumber of RowsSolderNumber of RowsSolderNumber of RowsSolderStrigeSolderNumber of RowsSolderNumber of RowsSolderNumber of RowsSolderStrigeSolderNumber of RowsSolderStrige MattingSolderStrige MattingSolderStrige MattingSolderStrige MattingSolderStrige TypeBackInsulation ColorBackInsulation Height0.059" (1.50mm)Contact Fungh - Post-	Manufacturer Part Number	DF38A-30S-0.3V(51)
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDF38Connector TypeReceptacleContact TypeConter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllNumber of Rows0.012°(0.30mm)Number of Rows1Row Spacing - MatingSocketNumber of Rows0.012°(0.30mm)Number of Rows0.012°(0.30mm)Number of RowsSocketNumber of RowsSocketNotaring TypeSocketPostening TypeSocketContact Finish - MatingGoldContact Finish - MatingSocketInsulation ColorBlackInsulation Finish - MatingSocyet (1.50mm)Insulation Finish - MatingSocyet (1.50mm)Contact Finish - MatingSocyet (1.50mm)Insulation Finish - MatingSocyet (1.50mm)<	Manufacturer	Hirose Electric Co Ltd
Package-SeriesDF38Connector TypeReceptacleContact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - MatingSufface MountMounting TypeSufface MountFreminationSolderFortion LockGoldContact Finish - MatingGoldContact Finish - MatingSupin (0.10µm)Insulation ColorBlackInsulation Height0.505" (1.50mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesDF38Connector TypeReceptacleContact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFreminationSolderFastening TypeFriction LockContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Package	-
Contact TypeCenter Strip ContactStyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFreminationSolderFastening TypeFriction LockContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Series	DF38
StyleBoard to Cable/WireNumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions30Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Contact Type	Center Strip Contact
Number of Positions LoadedAllPitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Style	Board to Cable/Wire
Pitch - Mating0.012" (0.30mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Number of Positions	30
Number of Rows1Number of Rows-Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Pitch - Mating	0.012" (0.30mm)
Mounting TypeSurface MountTerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Number of Rows	1
TerminationSolderFastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Row Spacing - Mating	-
Fastening TypeFriction LockContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3.9µin (0.10µm)Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Fastening Type	Friction Lock
Insulation ColorBlackInsulation Height0.059" (1.50mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.059" (1.50mm)Contact Length - Post-	Contact Finish Thickness - Mating	3.9µin (0.10µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.059" (1.50mm)
Operating Temperature 25%C 95%C	Contact Length - Post	-
-55°C ~ 85°C	Operating Temperature	-35°C ~ 85°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Gold
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place, Solder Retention

Report errors?

DF38A-30S-0.3V(51) Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DF38A-30S-0.3V(51) Payment Methods

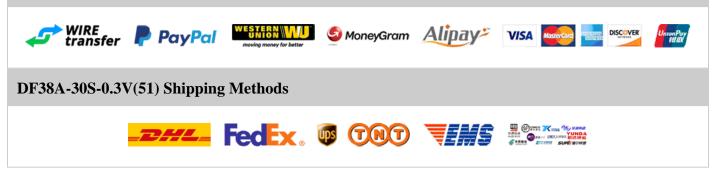

If you have any question about DF38A-30S-0.3V(51), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com