


# DF3A-5P-2DS

## **DF3A-5P-2DS Information**



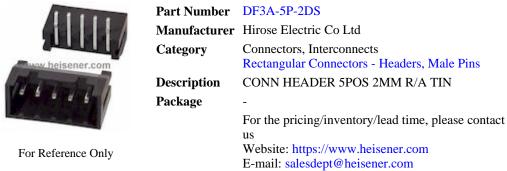

**Request a Quote** 

For Reference Only

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **DF3A-5P-2DS Specifications**

Manufacturer Part Number	DF3A-5P-2DS
Manufacturer	Hirose Electric Co Ltd
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Male Pins
Package	-
Series	DF3
Connector Type	Header
Contact Type	Male Pin
Pitch - Mating	0.079" (2.00mm)
Style	Board to Board or Cable
Shrouding	Shrouded - 4 Wall
Number of Positions	5
Number of Positions Loaded	All
Number of Rows	1
Row Spacing - Mating	-
Mounting Type	Through Hole, Right Angle
Termination	Press-Fit, Solder
Fastening Type	Push-Pull
Contact Length - Mating	0.122" (3.10mm)
Contact Length - Post	0.114" (2.90mm)
Overall Contact Length	-
Insulation Height	0.197" (5.00mm)
Contact Shape	Square
Contact Finish - Mating	Tin

Contact Finish Thickness - Mating	-
Contact Finish - Post	Tin
Contact Material	Brass
Insulation Material	Polyamide (PA), Nylon
Features	-
Operating Temperature	-55°C ~ 105°C
Ingress Protection	-
Material Flammability Rating	UL94 V-0
Insulation Color	Black
	Report errors?

#### **DF3A-5P-2DS** Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# **DF3A-5P-2DS** Payment Methods



If you have any question about DF3A-5P-2DS, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com