


# **DF63-2P-3.96DSA**

#### **DF63-2P-3.96DSA Information**

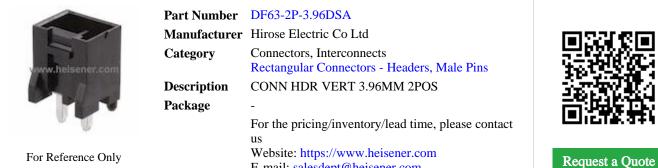

E-mail: salesdept@heisener.com

For Reference Only

#### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



#### **DF63-2P-3.96DSA Specifications**

Manufacturer Part Number	DF63-2P-3.96DSA
Manufacturer	Hirose Electric Co Ltd
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Male Pins
Package	-
Series	EnerBee? DF63
Connector Type	Header
Contact Type	Male Pin
Pitch - Mating	0.156" (3.96mm)
Style	Board to Cable/Wire
Shrouding	Shrouded - 4 Wall
Number of Positions	2
Number of Positions Loaded	All
Number of Rows	1
Row Spacing - Mating	-
Mounting Type	Through Hole
Termination	Solder
Fastening Type	Latch Holder
Contact Length - Mating	-
Contact Length - Post	0.150" (3.81mm)
Overall Contact Length	-
Insulation Height	0.683" (17.35mm)
Contact Shape	Square
Contact Finish - Mating	Tin

Contact Finish Thickness - Mating	-
Contact Finish - Post	Tin
Contact Material	Copper Alloy
Insulation Material	Polybutylene Terephthalate (PBT), Glass Filled
Features	Board Lock
Operating Temperature	-55°C ~ 105°C
Ingress Protection	-
Material Flammability Rating	UL94 V-0
Insulation Color	Black
	Report errors?

## DF63-2P-3.96DSA Guarantees



Quality Guarantees


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE

#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## DF63-2P-3.96DSA Payment Methods

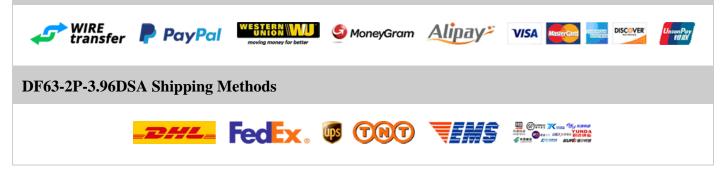

If you have any question about DF63-2P-3.96DSA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com