


DK1A1B-L2-24V

DK1A1B-L2-24V Information

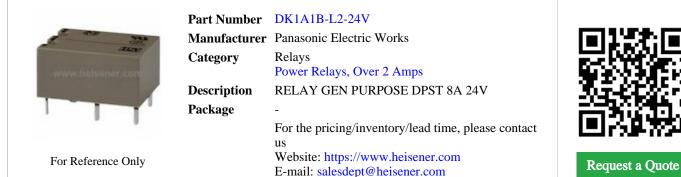

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



DK1A1B-L2-24V Specifications

CategoryRelaysCategoryPower Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)16.8 VDCTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Release Time8ms		
CategoryRelaysCategoryRelays, Over 2 AmpsPackage-Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Coperate TimeSmaRelease TimeSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer Part Number	DK1A1B-L2-24V
Power Relays, Over 2 AmpsPackage-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate TimeBmsRelease TimeSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Panasonic Electric Works
Package-SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Category	Relays
SeriesDKRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time8msRelease TimeSealed - FullyMounting TypeThrough HoleYernination StylePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Operate Time10msRelease TimeSmaleFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeLatching, Dual CoilCoil Yope8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time8msRelease TimeSealed - FullyFeaturesSnaled - FullyMounting TypePC Pin	Series	DK
Coil Current8.3mACoil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Form8ASwitching (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePermination StylePC Pin	Relay Type	General Purpose
Coil Voltage24VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSaled - FullyMounting TypeThrough HoleYen Pin LinePin Pin Pin Pin Pin Pin Pin Pin Pin Pin	Coil Type	Latching, Dual Coil
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC PinPC Pin	Coil Current	8.3mA
Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HolePC Pin	Coil Voltage	24VDC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)16.8 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	8A
Turn Off Voltage (Min)-Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 125VDC - Max
Operate Time10msRelease Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	16.8 VDC
Release Time8msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
FeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	8ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

DK1A1B-L2-24V Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DK1A1B-L2-24V Payment Methods



DK1A1B-L2-24V Shipping Methods



If you have any question about DK1A1B-L2-24V, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com